Verdelli International Srl

EQUIPMENT AND SPARE PARTS
LIFTING, PILING, EARTHMOVING MACHINERY
DEMOLITION TOOLS

ATTACHMENTS CATALOGUE 2018

FIXED PILE BREAKER

MODEL	OIL PRESS.	EXCAVATOR WEIGHT	OIL FLOW	TIP	WEIGHT	DIMENSIONS (mm)		
	BAR	t	L	TYPE	kg	A	B	C
F.I.P.F. 250-350	320	8	30	L	600	1190	320	360
	320			SL			360	
F.I.P.F. 400-500	320	10	40	C	850	1700	620	480
	320			L			570	
				SL			520	

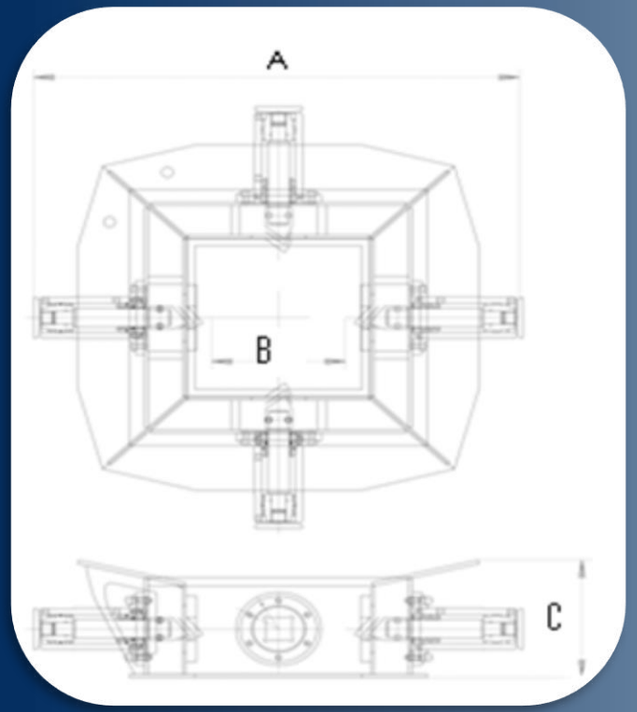

PILE BREAKER FOR SQUARE PILES

MODEL	OIL FLOW	EXCAVATOR WEIGHT	OIL	ELEMENTS	TIP	MESH	WEIGHT	DIMENSIONS (mm)			
	BAR	t	L	NUM.	TYPE	TYPE	kg	A	B	C	D
F.I.P.Q. 250	300	7	80	4A	L210	4B	660	250	380	80	1600
F.I.P.Q. 300	300	7	80	4A	L210	4B	660	300	380	80	1600
F.I.P.Q. 350	300	7	80	4A	M185	4B	660	350	430	130	1600
F.I.P.Q. 400	300	7	80	4A	C160	4B	660	400	480	180	1600
F.I.P.Q. 450	300	7	80	4A	M185	4BS	680	450	490	190	1700
F.I.P.Q. 500	300	7	80	4A	C160	4BS	680	500	540	240	1700
F.I.P.Q. 500	300	10	120	4D	L210	4E	1100	500	550	250	1800
F.I.P.Q. 550	300	10	120	4D	M185	4E	1100	550	600	300	1800
F.I.P.Q. 600	300	10	120	4D	C160	4E	1100	600	650	350	1800
F.I.P.Q. 650	300	15	120	4D	L210	4B	1000	650	690	390	2000
F.I.P.Q. 700	300	15	120	4D	M185	4B	1000	700	740	440	2000
F.I.P.Q. 750	300	15	120	4D	C160	4B	1000	750	790	490	2000

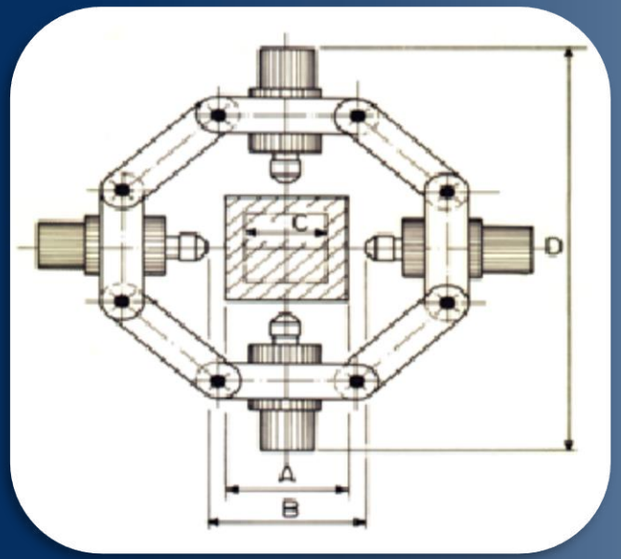

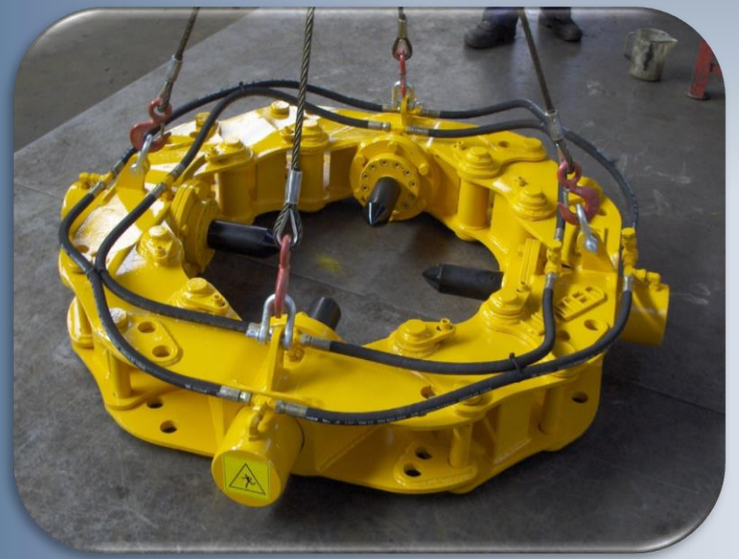

PILE BREAKER FOR SQUARE PILES

MODEL VIP	OIL FLOW	EXCAVATOR WEIGHT	OIL	ELEMENTS	TIP	MESGH	WEIGHT	DIMENSIONS (mm)			
	BAR	t	L	NUM.	TYPE	TYPE	kg	A	B	C	D
300	300	7	80	6A	L210	6A	960	350	400	100	1600
350	300	7	80	6A	L210	6A	960	350	400	100	1600
400	300	7	80	6A	M185	6A	960	400	450	150	1660
450	300	10	80	6A	C160	6A	960	450	500	200	1660
500	300	10	100	7A	L210	7A	1120	500	560	260	1850
550	300	10	100	7A	M185	7A	1120	550	610	310	1850
600	300	13	100	7A	C160	7A	1120	600	660	360	1850
650	300	13	120	8A	L210	8A	1300	650	750	450	2000
700	300	13	120	8A	M185	8A	1300	700	800	500	2000
750	300	13	120	8A	C160	8A	1300	750	850	550	2000
800	300	13	120	8A	C160	8A	1300	800	850	550	2000
900	300	15	150	9A	L210	9A	1450	900	1000	700	2000

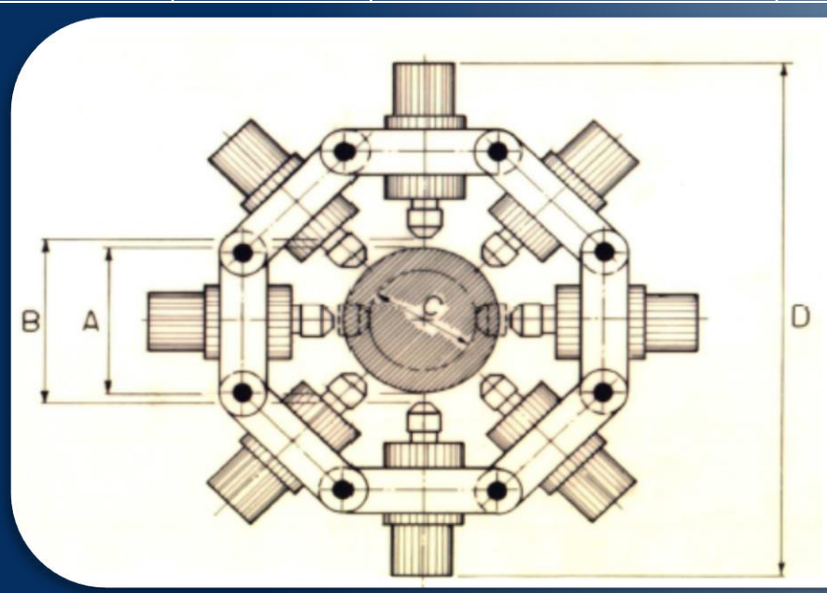

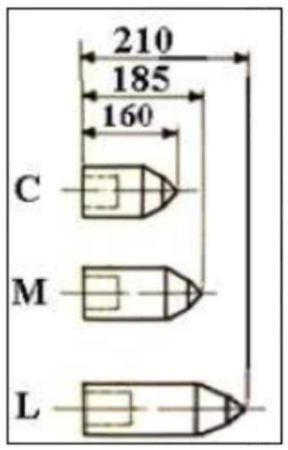

PILEBREAKERS HEAVY DUTIES FOR ROUND PILES

MODEL VIP-HD	OIL PRESS	EXCAVATOR WEIGHT	OIL FLOW	ELEMENTS	TIP	WEIGHT	DIMENSIONS (mm)			
	BAR	t	L	NUM.	TYPE	kg	A	B	C	D
700	300	20	200	8F	M185	1800	700	820	520	2060
800	300	20	200	8F	C160	1800	800	870	570	2060
900	300	22	225	9F	M185	2050	900	990	690	2230
1000	300	22	225	9F	C160	2050	1000	1040	740	2230
1100	300	25	250	10F	M185	2275	1100	1165	865	2430
1200	300	25	250	10F	C160	2275	1200	1215	915	2430
1300	300	28	275	11F	M185	2500	1300	1376	1040	2560
1400	300	28	275	11F	C160	2500	1400	1430	1090	2560
1500	300	28	300	12F	C160	2725	1500	1550	1260	2730
1600	300	30	320	13F	L210	2950	1600	1670	1350	2900
1700	300	30	320	13F	C160	2950	1700	1770	1450	2900
1800	300	36	320	14F	M185	3200	1800	1888	1568	3060
1900	300	36	320	14F	C160	3200	1900	1945	1625	3060
2000	300	36	350	15F	M185	3425	2000	2060	1740	3230

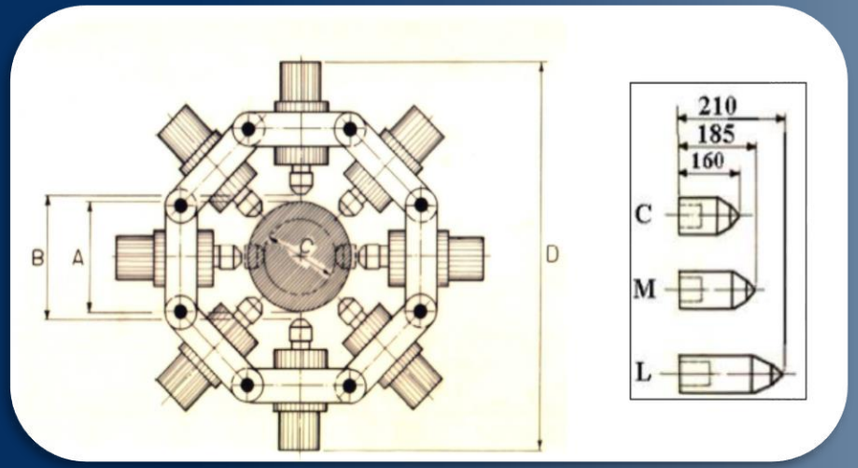

LIGHT PILEBRAKER FOR CIRCULAR PILES

MODEL	OIL PRESS.	EXCAV. WEIGHT	ELEMENTS	WEIGHT	DIMENSIONS (mm)				PRICE
	BAR	t	NUM.	kg	A	B	C	D	
F.P.L 300	300	7	6	710	160	430	300	1460	€ 14.500,00
F.P.L 350	300	7	6	710	160	430	350	1460	€ 14.500,00
F.P.L 400	300	7	6	710	160	430	400	1460	€ 14.500,00
F.P.L 450	300	8	7	870	310	580	450	1600	€ 17.200,00
F.P.L 500	300	8	7	870	310	580	500	1600	€ 17.200,00
F.P.L 550	300	8	7	870	310	580	550	1600	€ 17.200,00
F.P.L 600	300	9	8	980	445	715	600	1750	€ 19.600,00
F.P.L 650	300	9	8	980	445	715	650	1750	€ 19.600,00
F.P.L 700	300	10	9	1190	579	849	700	1900	€ 22.000,00
F.P.L 750	300	10	9	1190	579	849	750	1900	€ 22.000,00
F.P.L 800	300	10	9	1190	579	849	800	1900	€ 22.000,00
F.P.L 900	300	15	10	1300	710	980	900	2020	€ 24.300,00
F.P.L 1000	300	15	11	1410	840	1110	1000	2145	€ 26.600,00

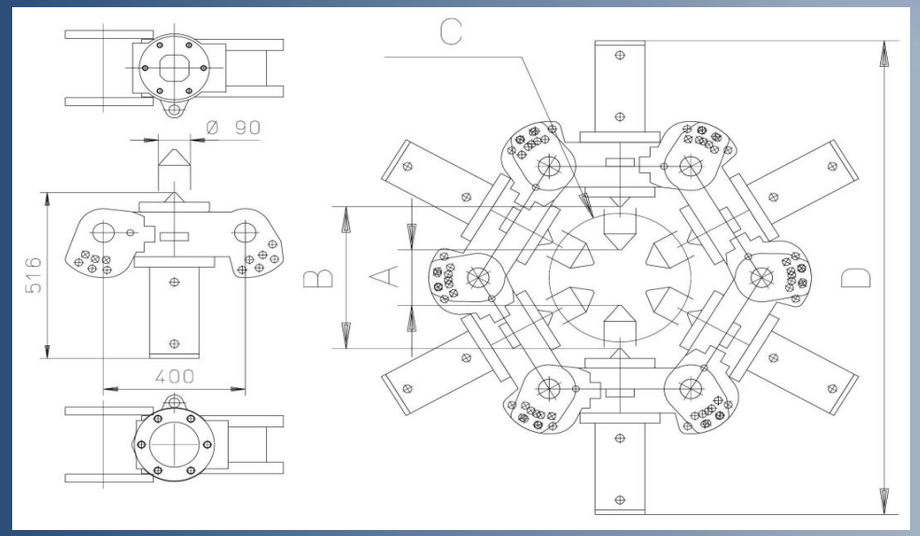

Discover THE NEW MULTIPROCESSOR WITH FAST CHANGE SYSTEM!

THE NEW MULTIPROCESSOR WITH FAST CHANGE SYSTEM

MODEL	OIL PRESS.	EXCAVATOR WEIGHT	OIL	TOTAL WEIGHT	KIT WEIGHT	HEIGHT	OPENING
	BAR	t	L	kg	kg	mm	mm
C.D_ C 3 R	220	3,6-4,4	48	375	100	1100	380
C.D_ C 5 R	250	6,5-8,5	60	560	110	1100	400
C.D_ C 7 R	300	6-11	80	650	120	1100	500
C.D_ C 10 R	300	15-17	120	1080	230	1800	610
C.D_ C 15 R	300	17-20	200	1600	350	2000	720
C.D_ C 20 R	300	19-22	220	1900	480	2100	800
C.D_ C 23 R	300	22-25	230	2600	800	2200	900
C.D_ C 35 R	300	27-33	300	3800	1000	2600	1080

MODEL	OIL PRESS.	EXCAVATOR WEIGHT	OIL	TOTAL WEIGHT	KIT WEIGHT	HEIGHT	OPENING
	BAR	t	L	kg	kg	mm	mm
C.D_ F 3 R	220	3,6-4,4	48	385	110	1100	370
C.D_ F 5 R	250	6,5-8,5	60	580	130	1100	390
C.D_ F 7 R	300	6-11	80	650	150	1200	450
C.D_ F 10 R	300	15-17	120	1130	300	1800	570
C.D_ F 15 R	300	17-20	200	1620	420	2000	680
C.D_ F 20 R	300	19-22	220	1900	520	2100	800
C.D_ F 23 R	300	22-25	230	2600	800	2200	850
C.D_ F 35 R	300	27-33	300	3800	1200	2600	980

THE NEW MULTIPROCESSOR WITH FAST CHANGE SYSTEM

MODEL	OIL PRESS.	EXCAVATOR WEIGHT	OIL	TOTAL WEIGHT	KIT WEIGHT	EIGHT	OPENING
	BAR	t	L	kg	kg	mm	mm
C.D_ S 3 R	220	3,6-4,4	48	375	100	1100	210
C.D_ S 5 R	250	6,5-8,5	60	560	110	1100	300
C.D_ S 7 R	300	6-11	80	630	120	1100	315
C.D_ S 10 R	300	15-17	120	980	230	1800	345
C.D_ S 15 R	300	17-20	200	1600	400	2000	380
C.D_ S 20 R	300	19-22	220	1900	480	2000	450
C.D_ S 23 R	300	22-25	230	2550	720	2200	540
C.D_ S 35 R	300	27-33	300	3700	1100	2600	600

MODEL	OIL PRESS.	EXCAVATOR WEIGHT	OIL	TOTAL WEIGHT	KIT WEIGHT	EIGHT	OPENING
	BAR	t	L	kg	kg	mm	mm
C.D_ M 3 R	220	3,6-4,4	48	375	100	1100	380
C.D_ M 5 R	250	6,5-8,5	60	560	110	1100	410
C.D_ M 7 R	300	6-11	80	650	140	1200	480
C.D_ M 10 R	300	15-17	120	110	250	1800	610
C.D_ M 15 R	300	17-20	200	1630	430	2000	720
C.D_ M 20 R	300	19-22	220	1900	520	2100	800
C.D_ M 23 R	300	22-25	230	2250	750	2200	900
C.D_ M 35 R	300	27-33	300	3850	1250	2600	1080

CRUSHER

MODEL	OIL PRESS.	EXCAVATOR WEIGHT	OIL FLOW	WEIGHT	DIMENSIONS (mm)	
	BAR	t	L	kg	A	B
P.D.I. 1,5	250	1,4-1,6	30	190	250	1100
P.D.I. 2	250	1,6-1,8	30	240	300	1200
P.D.I. 3	250	3,6-4,4	48	300	400	1400
P.D.I. 5	300	6,5-8,5	80	600	550	1700
P.D.I. 10	320	12,5-13,5	160	110	600	1850
P.D.I. 15	320	17-20	180	1600	720	2100
P.D.I. 20	320	20-22	200	2100	800	2200
P.D.I. 23	320	22-25	220	2700	900	2400
P.D.I. 30	320	27-33	250	4500	1000	2700
P.D.I. 40	320	36-34	300	6000	1100	2850
P.D.I. 80	320	60-80	350	8500	1900	3800

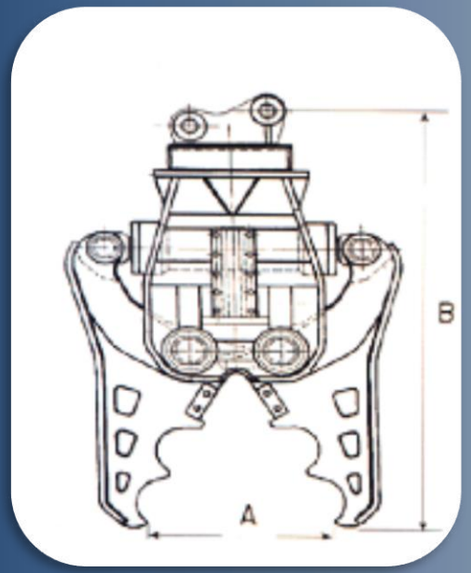

VERTICAL HYDRAULIC SHEARS

MODEL	OIL PRESS.	EXCAVATOR WEIGHT	OIL FLOW	CRUSHING POWER (t)		WEIGHT	DIMENSIONS (mm)				
	BAR	t	L	TIP	SHEARS	kg	A	B	C	D	E
C.D.I.V. 10	320	12-15	160	60	120	1100	330	780	2000	340	350
C.D.I.V. 15	320	17-20	200	80	150	1600	360	900	2500	420	380
C.D.I.V. 23	320	22-25	230	120	200	2500	500	1200	3000	450	400
C.D.I.V. 30	320	27-33	300	130	220	4000	600	1300	3600	500	440
C.D.I.V. 40	320	36-50	300	160	300	6000	870	1600	4000	600	500
C.D.I.V. 70	320	75	350	180	350	7500	930	1900	4600	1000	5500
C.D.I.V. 120	320	120	400	280	490	12600	1100	2150	5200	1100	650

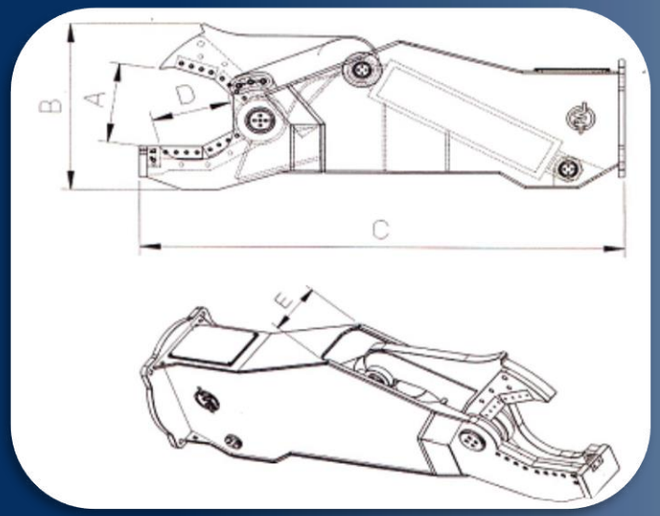

HYDRAULIC SHEARS

MODEL	OIL PRESS.	EXCAVATOR WEIGHT	OIL FLOW	WEIGHT	DIMENSIONS (mm)					
	BAR	t	L	kg	A	B	C	D	E	F
C.D.I.S. 2	250	1.6-1.8	30	230	100	300	500	600	600	140
C.D.I.S. 3	250	5-6.5	50	350	180	380	765	765	730	200
C.D.I.S. 5	250	6.5-8.5	80	500	220	500	900	1050	1050	280
C.D.I.S. 10	320	12.5-13.5	120	1000	300	750	1250	1400	1350	340
C.D.I.S. 15	320	17-20	200	1600	400	900	1400	1500	1450	400
C.D.I.S. 23	320	22-25	230	2500	500	1050	1760	1800	1700	420
C.D.I.S. 30	320	27-33	300	4000	600	1300	2150	2300	2200	560
C.D.I.S. 40	320	36-44	350	6000	700	1450	2250	2550	2400	600

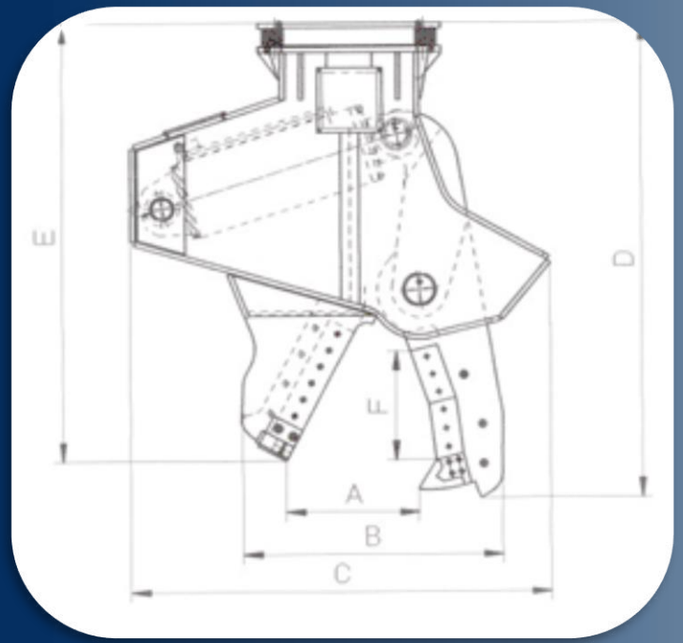

PULVERIZER

MODEL	OIL PRESS.	EXCAVATOR WEIGHT	OIL FLOW	CRUSHING POWER (t)		WEIGHT	DIMENSIONS (mm)	
	BAR	t	L	TIPS	SHEARS	kg	A	B
D.I. 3	280	3.6-4.4	48	18	30	350	350	1350
D.I. 5	280	06-12	60	25	50	550	400	1400
D.I. 7	300	06-12	100	40	80	750	550	1650
D.I. 10	320	12-15	160	50	90	1000	600	1750
D.I. 13	320	17-20	180	80	150	1300	700	1950
D.I. 18	320	20-22	200	100	180	1800	800	2100
D.I. 23	320	22-25	230	120	200	2300	900	2200
D.I. 30	320	27-33	280	160	250	4500	1000	2400

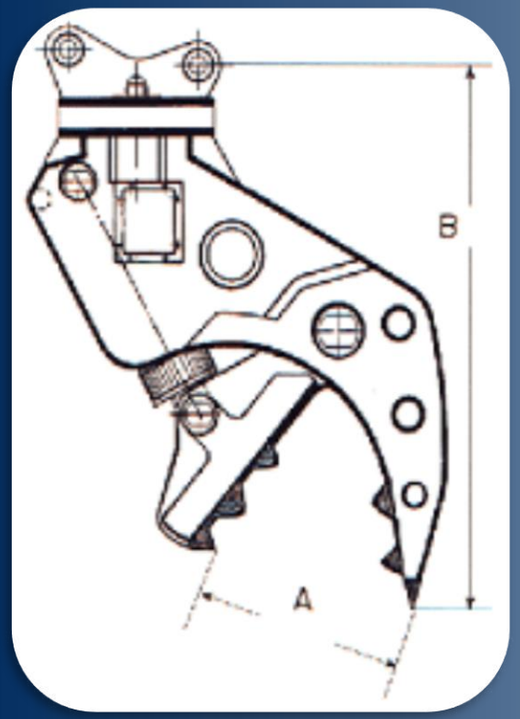

ELECTROHYDRAULIC ORANGE PEEL GRAB
(SERIE SL – SPECIFIC WEIGHT UNTIL 0,8 T/M³)

MODEL	CAPAC.	PEEL	ENGINE	TIME		WEIGHT (kg)			DIMENSIONS (mm)			
	m³	No.	KW	OP.	CL.	OPENED	HALF	CLOSED	A	B	C	D
P.E. 6/ 1500 SL	1.5	6	15	6	9	2110	2180	2250	1960	3100	2520	2260
P.E. 6/ 2000 SL	2	6	15	6	9	2310	2480	2550	2000	3155	2555	2275
P.E. 6/ 2500 SL	2.5	6	22	7	10	2400	2600	2850	2280	3700	2950	2500
P.E. 8/ 1500 SL	1.5	8	15	7	10	2370	2430	2500	1960	3100	2520	2260
P.E. 8/ 2000 SL	2	8	15	7	10	2550	2620	2700	2000	3155	2555	2275
P.E. 8/ 2500 SL	2.5	8	18.5	8	15	2700	2800	2900	2290	3700	2950	2500
P.E. 8/ 3000 SL	3	8	18.5	8	15	3280	3500	3600	2370	3880	2950	2680
P.E. 8/ 3500 SL	3.5	8	18.5	8	15	3300	3700	3800	2450	4020	2950	2700
P.E. 8/ 4000 SL	4	8	18.5	9	15	3420	3680	3850	2550	4300	3000	2720
P.E. 8/ 5000 SL	5	8	22	7	11	4500	4600	5000	2850	4500	3100	2750
P.E. 8/ 6000 SL	6	8	22	7	11	5400	5500	5600	2870	4740	3320	2750
P.E. 8/ 7000 SL	7	8	22	7	11	5560	5680	5800	2950	4820	3360	3000
P.E. 8/ 8000 SL	8	8	22	7	11	5760	5880	6000	3000	4930	3400	3000
P.E. 8/ 9000 SL	9	8	30	8	14	7480	7650	7850	3500	5300	3750	3300
P.E. 8/10000 SL	10	8	30	8	14	7500	7800	8100	3500	5600	3800	3300
P.E. 8/12000 SL	12	8	30	8	14	7650	7850	8300	3600	5700	3950	3300

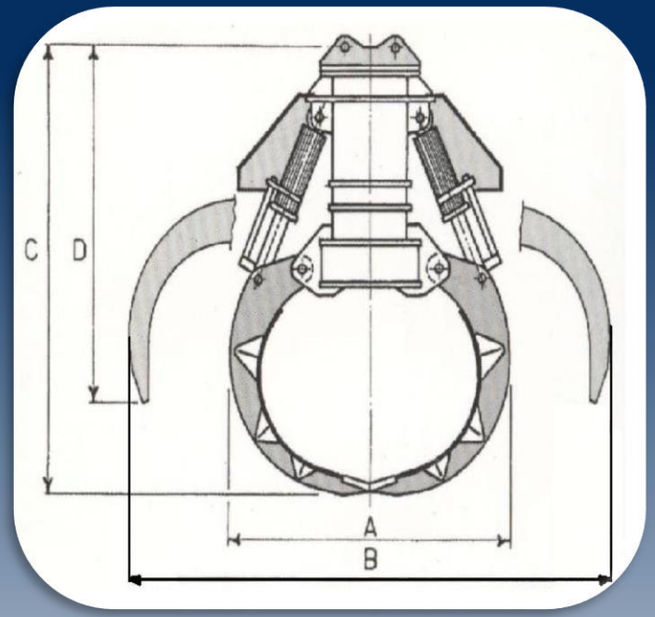

ELECTROHYDRAULIC ORANGE PEEL GRAB (SERIE SL – SPECIFIC WEIGHT UNTIL 2 T/M³)

MODEL	CAPAC	PEEL	ENGINE	TIME		WEIGHT (kg)			DIMENSIONS (mm)			
	m³	No.	KW	OP.	CL.	OPENED	HALF	CLOSED	A	B	C	D
P.E. 6/ 350 L	0.35	6	5.5	3	5	700	820	900	1200	1900	1640	1510
P.E. 6/ 500 L	0.5	6	5.5	3	5	880	940	1000	1000	2100	1690	1600
P.E. 6/ 750 L	0.75	6	7.5	3	5	1080	1140	1200	1300	2330	1850	1700
P.E. 6/ 1000 L	1	6	11	3.5	5	1680	1740	1900	1670	2530	2230	1900
P.E. 6/ 1500 L	1.5	6	15	3.5	5	2110	2180	2250	1960	3100	2520	2260
P.E. 6/ 2000 L	2	6	15	3.5	5	2310	2480	2550	2000	3155	2555	2275
P.E. 6/ 2500 L	2.5	6	22	5	9	3040	3120	3200	2280	3700	2950	2500
P.E. 8/ 1000 L	1	8	11	6	9	1640	1720	2000	1670	2530	2230	1900
P.E. 8/ 1500 L	1.5	8	15	6	9	2370	2430	2500	1960	3100	2520	2260
P.E. 8/ 2000 L	2	8	15	7	10	2550	1620	2700	2000	3155	2555	2275
P.E. 8/ 2500 L	2.5	8	22	7	11	3340	3420	3500	2290	3700	2950	2500
P.E. 8/ 3000 L	3	8	22	7	11	4000	4200	4500	2370	3880	2950	2680
P.E. 8/ 3500 L	3.5	8	30	7	11	4200	4400	4600	2450	4020	2950	2700
P.E. 8/ 4000 L	4	8	30	7	11	4420	4560	4700	2550	4300	3000	2720
P.E. 8/ 4500 L	4.5	8	30	7	11	4720	4860	5000	2700	4550	3250	2720
P.E. 8/ 5000 L	5	8	30	8	12	5200	5300	5400	2850	4500	3100	2750
P.E. 8/ 6000 L	6	8	30	8	12	5400	5500	5600	2870	4740	3320	2750
P.E. 8/ 7000 L	7	8	22	8	12	5560	5860	5800	2950	4820	3360	3000
P.E. 8/ 8000 L	8	8	22	8	12	5760	5880	6000	3000	4930	3400	3000
P.E. 8/ 9000 L	9	8	30	13	18	7900	8100	8500	3400	5300	3750	3300
P.E. 8/10000 L	10	10	30	13	18	8250	8600	9000	3500	5600	3800	3500
REVERSE SERIE												
P.E. 6/ 500 LI	0.5	6	5.5	3	5	880	940	1000	1250	2100	1690	1600
P.E. 6/ 750 LI	0.75	6	5.5	5	8	1080	1140	1200	1300	2330	1850	1700
P.E. 6/ 1000 LI	1	6	11	6	9	1640	1720	2000	1670	2530	2230	1900
P.E. 6/ 1500 LI	1.5	6	30	5	8	2370	2430	2500	1960	3100	2520	2260
P.E. 6/ 2000 LI	2	6	30	5	8	2550	2620	2700	2000	3155	2555	2275
P.E. 6/ 2500 LI	2.5	6	30	6	9	3340	3420	3500	2290	3700	2950	2500

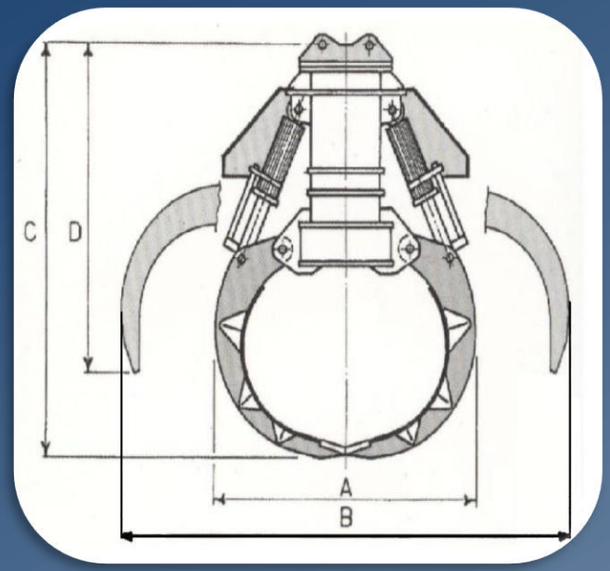

ELECTROHYDRAULIC ORANGE PEEL GRAB (SERIE SL – SPECIFIC WEIGHT UNTIL 2,7 T/M³)

MODEL	CAPAC.	PEEL	ENGINE	TIME		WEIGHT (kg)			DIMENSIONS (mm)			
	m³	No.	KW	OPEN	CL.	OPEN	HALF	CLOSED	A	B	C	D
P.E. 6/ 500 P	0.5	6	7.5	5	8	1260	1320	1400	1250	2100	1690	1600
P.E. 6/ 750 P	0.75	6	7.5	5	8	1250	1400	1600	1550	2400	2030	1900
P.E. 6/ 800 P	0.8	6	7.5	5	8	1270	1450	1650	1650	2400	2030	1900
P.E. 6/ 1000 P	1	6	11	5	8	2000	2050	2100	1750	2750	2350	2200
P.E. 6/ 1500 P	1.5	6	22	8	12	2760	2880	3100	2000	3180	2750	2300
P.E. 8/ 1000 P	1	8	15	6	9	2350	2430	2550	1750	2750	2650	2200
P.E. 8/ 1500 P	1.5	8	22	8	15	3000	3100	3200	2000	3180	2750	2300
P.E. 8/ 2000 P	2	8	22	8	15	4020	4260	4500	2050	3350	2900	2500
P.E. 8/ 2500 P	2.5	8	30	8	14	4500	4600	4700	2300	3700	2950	2650
P.E. 8/ 3000 P	3	8	30	8	14	5650	5800	6300	2370	3720	3070	2680
P.E. 8/ 3500 P	3.5	8	30	8	14	6100	6250	6390	2450	4020	3120	2700
P.E. 8/ 4000 P	4	8	37	8	14	6250	6350	6430	2550	4300	3200	2730
P.E. 8/ 4500 P	4.5	8	37	12	16	6600	6900	6980	2700	4550	3250	2730
P.E. 8/ 5000 P	5	8	45	12	16	6900	7200	7300	2850	4650	3300	2750
REVERSE SERIE												
P.E. 6/ 750 P I	0.75	6	15	5	8	1200	1400	1600	1550	2400	2030	1900
P.E. 6/ 800 P I	0.8	6	18	5	8	1250	1450	1650	1650	2400	2030	1900
P.E. 6/ 1000 P I	1	6	18.5	5	8	2000	2050	2100	1750	2750	2350	2200
P.E. 6/ 1500 P I	1.5	6	18.5	8	12	2760	2880	3100	2000	3180	2750	2300
P.E. 8/ 1000 P I	1	8	18.5	6	9	2350	2430	2550	1750	2750	2650	2200
P.E. 8/ 1500 P I	1.5	8	22	7	10	3000	3100	3200	2000	3180	2750	2300
P.E. 8/ 2000 P I	2	8	22	7	10	4020	4260	4500	2050	3350	2900	2500
P.E. 8/ 2500 P I	2.5	8	30	9	15	4500	4600	4700	2250	3670	2950	2650
P.E. 8/ 3000 P I	3	8	30	8	12	5650	5800	6300	2370	3720	3070	2680
P.E. 8/ 3500 P I	3.5	8	30	10	15	6100	3250	6390	2450	4020	3120	2700

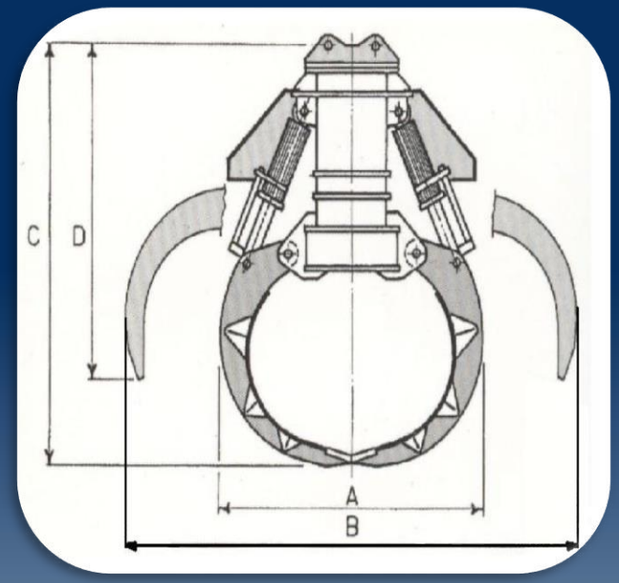

ELECTROHYDRAULIC ORANGE PEEL GRAB (SERIE SL – SPECIFIC WEIGHT UNTIL 4,4 T/M³)

MODEL	CAPAC.	PEEL	ENGINE	TIME		WEIGHT (kg)			DIMENSIONS			
	m³	No.	KW	OP.	CL.	OPENED	HALF	CLOSED	A	B	C	D
P.E. 6/ 750 HD	0.75	6	15	5	8	2550	2650	2700	1550	2400	2030	1900
P.E. 6/ 1000 HD	1	6	15	5	8	2600	2720	2850	1750	2750	2650	2200
P.E. 6/ 1500 HD	1.5	6	20	8	12	3700	3860	4000	2000	3180	2750	2300
P.E. 8/ 1000 HD	1	8	18.5	6	9	2950	3050	3150	1750	2750	2650	2200
P.E. 8/ 1500 HD	1.5	8	22	8	12	4130	4290	4430	2000	3180	2750	2300
P.E. 8/ 2000 HD	2	8	22	8	12	4750	4960	5300	2050	3350	2900	2500
P.E. 8/ 2500 HD	2.5	8	30	9	15	5300	5860	6400	2300	3700	2950	2650
P.E. 8/ 3000 HD	3	8	30	12	16	8000	8200	8500	2370	3720	3070	2680
P.E. 8/ 3500 HD	3.5	8	30	12	16	8500	8670	8900	2450	4020	3120	2700
P.E. 8/ 4000 HD	4	8	37	12	16	8900	9050	9200	2550	4300	3200	2730
P.E. 8/ 4500 HD	4.5	8	37	12	16	9150	9300	9450	2700	4550	3250	2730
P.E. 8/ 5000 HD	5	8	45	12	16	9230	9400	9600	2850	4650	3300	2750

REVERSE SERIE												
P.E. 6/ 750 HD I	0.75	6	15	5	8	2550	2650	2700	1550	2400	2030	1900
P.E. 6/ 1000 HDI	1	6	18.5	5	8	2600	2720	2850	1750	2750	2350	2200
P.E. 6/ 1500 HDI	1.5	6	18.5	8	12	3700	3860	4000	2000	3180	2750	2300
P.E. 8/ 1000 HDI	1	8	18.5	6	9	2950	3050	3150	1750	2750	2650	2200
P.E. 8/ 1500 HDI	1.5	8	22	7	10	4130	4290	4430	2000	3180	2750	2300
P.E. 8/ 2000 HDI	2	8	22	7	10	4750	4960	5300	2050	3350	2900	2500
P.E. 8/ 2500 HDI	2.5	8	30	9	15	5300	5860	6400	2250	3670	2950	2650
P.E. 8/ 3000 HDI	3	8	30	8	12	8000	8670	8900	2370	3720	3070	2680
P.E. 8/ 3500 HDI	3.5	8	30	10	15	8500	9050	9200	2450	4020	3120	2700

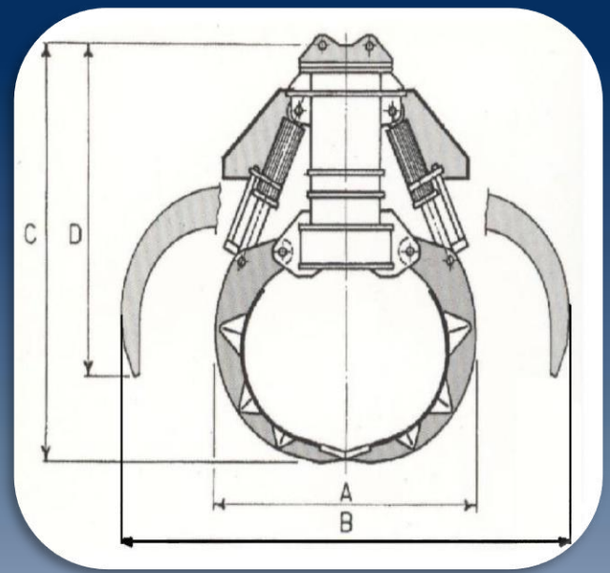

RECTANGULAR HYDRAULIC GRAB

MODEL	CAPAC.	PEEL	ENGINE	TIME		WEIGHT (kg)			DIMENSIONS (mm)				
	m³	No.	KW	OP	CL.	OP.	HALF	CL.	A	B	C	D	E
R.E. 8/ 1500	1.5	8	22									R.E. 8/ 1500	1.5
R.E. 8/ 2000	2	8	22									R.E. 8/ 2000	2
R.E. 8/ 2500	2.5	8	30									R.E. 8/ 2500	2.5
R.E. 8/ 3000	3	8	30	12	16	8500	3070	2700	2370	3700	2400	R.E. 8/ 3000	3

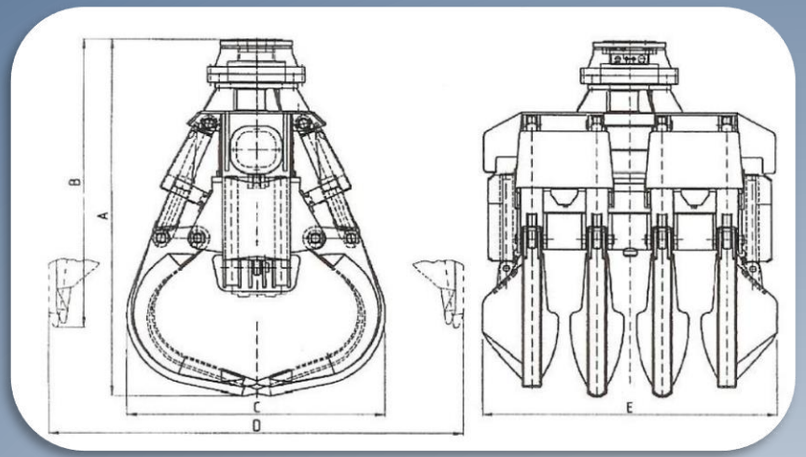

REVERSE SERIE													
R.E. 8/ 1500 I	1.5	8	22									R.E. 8/ 1500 I	1.5
R.E. 8/ 2000 I	2	8	22									R.E. 8/ 2000 I	2
R.E. 8/ 2500 I	2.5	8	30									R.E. 8/ 2500 I	2.5
R.E. 8/ 3000 I	3	8	30	13	18	8500	3070	2700	2370	3700	2400	R.E. 8/ 3000 I	3

ELECTROHYDRAULIC CLAMSHELL 2 ORIZONTAL CYLINDERS

MODEL	CAP	ENGINE	PRESSURE	TIME		CLAM POWER	WEIGHT	DIMENSIONS (mm)				
	m^3	KW	kg/cm^2	OP.	CL.	kg	kg	A	B	C	D	E
M.E.-O. 2/750	0,75	11	130	5	7	6500	1500	1500	2100	1000	1300	1300
M.E.-O 2/1000	1	15	130	5	7	7000	1500	1605	2350	1360	1460	1320
M.E.-O.2/1500	1,5	15	130	5	8	7000	2200	1850	2750	1400	1700	1580
M.E.-O.2/2000	2	18,5	130	5	8	7000	2700	2100	3120	1470	1950	1740
M.E.-O.2/2500	2,5	18,5	130	5	8	8000	2900	2100	3250	1470	2000	1740
M.E.-O.2/3000	3	18,5	130	5	8	9000	3200	2100	3600	1670	2000	1800
M.E.-O.2/4000	4	22	130	6	10	9500	4000	2300	3400	1800	2350	2050
M.E.-O.2/5000	5	30	130	10	14	13000	5000	2500	4000	2000	2650	2350
M.E.-O.2/6000	6	30	140	10	14	15000	5500	2650	4200	2100	2800	2500
M.E.-O.2/7000	7	30	140	10	14	15000	6000	2850	4400	2200	3000	2600
M.E.-O.2/8000	8	37,5	140	12	18	15500	7000	3000	4600	2300	3200	2800
M.E.-O 2/10000	10	42	140	12	18	18000	8000	3300	4800	2500	3400	3000
M.E.-O 2/12000	12	42	140	16	24	20000	9000	3600	5000	2700	3600	3200

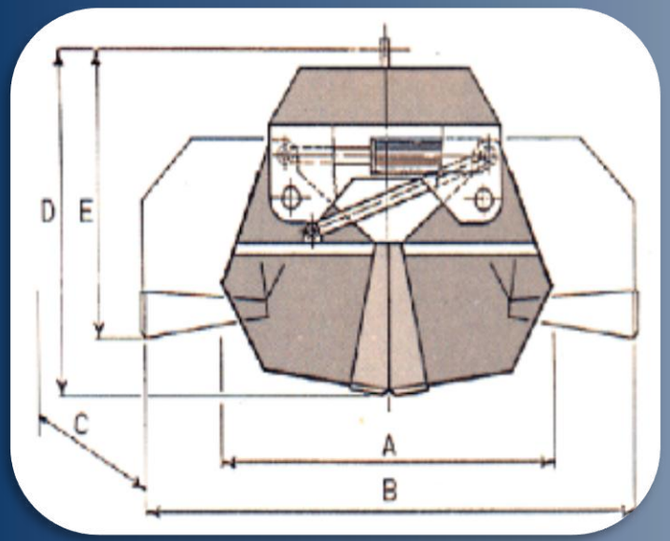

ELECTROHYDRAULIC CLAMSHELL 2 VERTICAL CYLINDERS (SPECIFIC WEIGHT UNTIL 3,6 T/M³)

MODEL	CAPAC.	ENGINE	PRESS.	TIME		CLAM POWER	WEIGHT	DIMENSIONS (mm)				
	m³	KW	kg/cm²	OP.	CL.	kg	kg	A	B	C	D	E
M.E.-V. 2/ 300	0,3	7,5	150	5	6,5"	6000	750	1350	1160	1800	1400	800
M.E.-V. 2/ 400	0,4	7,5	150	5	6,5"	6000	980	1350	1160	1800	1400	950
M.E.-V. 2/ 500	0,5	7,5	150	5	6,5"	6000	1050	1450	1400	1850	1500	1000
M.E.-V. 2/ 600	0,6	7,5	150	5	6,5"	6000	1100	1450	1400	1850	1500	1100
M.E.-V. 2/ 750	0,75	11	150	4"	7"	6000	1200	1500	1450	2000	1600	115

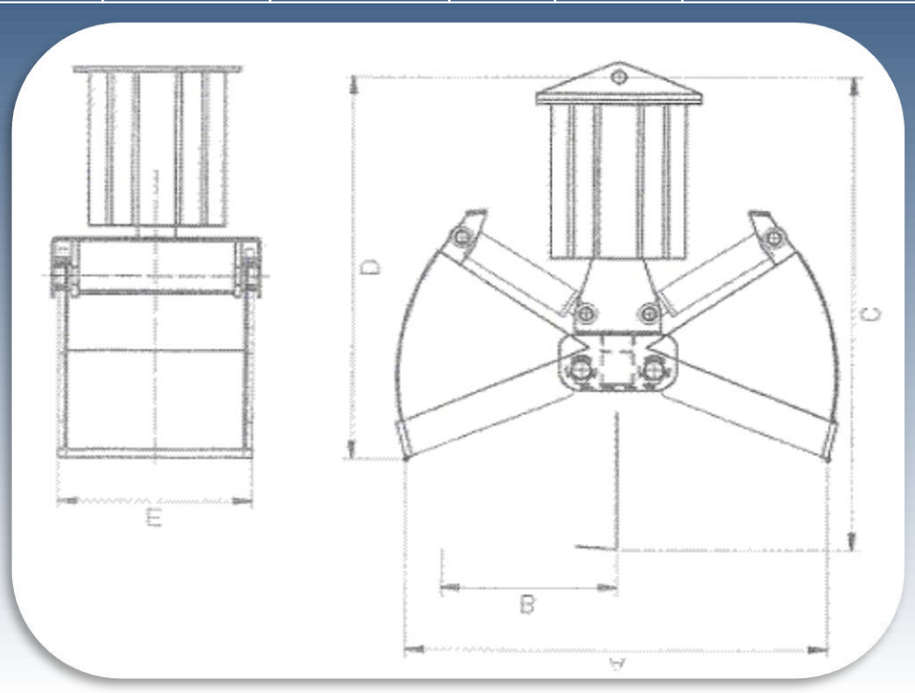

ELECTROHYDRAULIC CLAMSHELL 2 VERTICAL CYLINDERS (SPECIFIC WEIGHT UNTIL 0,7 T/M³)

MODEL	CAPAC.	ENGINE	PRESS.	TIME		CLAM POWER	WEIGHT	DIMENSIONS (mm)				
	m³	KW	kg/cm²	OP..	CL.	kg	kg	A	B	C	D	E
M.E.-V. 2/ 1000 SL	1	7,5	150	6	9	6000	1600	2300	1950	1900	1500	1400
M.E.-V. 2/ 1500 SL	1,5	11	150	6	9	6000	1800	2500	1950	1900	1550	1450
M.E.-V. 2/ 2000 SL	2	11	150	6	9	6000	1900	2500	2000	2000	1650	1600
M.E.-V. 2/ 2500 SL	2,5	11	150	6	9	6000	2100	2600	2100	2000	1650	1900
M.E.-V. 2/ 3000 SL	3	15	150	10	14	6500	2200	2900	2400	2300	1700	2000
M.E.-V. 2/ 3500 SL	3,5	15	150	10	14	6500	2500	3000	2600	2300	1800	2000
M.E.-V. 2/ 4000 SL	4	18,5	150	10	14	6500	3000	3300	2900	2500	1800	2000
M.E.-V. 2/ 5000 SL	5	18,5	150	10	14	6500	3200	3400	2900	2500	1800	2300

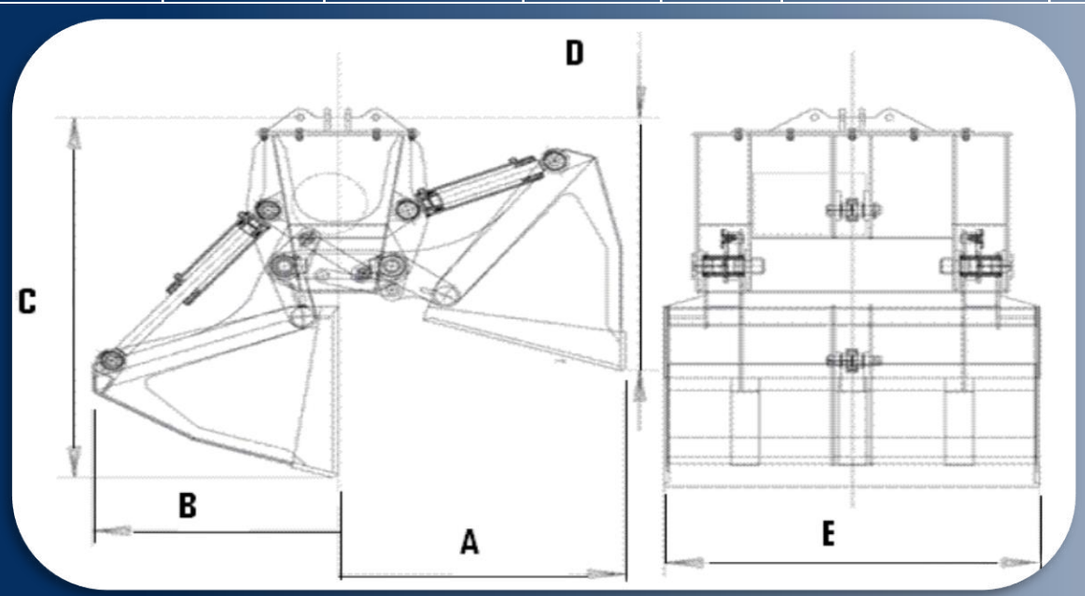

ELECTROHYDRAULIC CLAMSHELL 2 VERTICAL CYLINDERS (SPECIFIC WEIGHT UNTIL 1,4 T/M³)

MODEL	CAPAC.	ENGINE	PRESS.	TIME		CLAM POWER	WEIGHT	DIMENSIONS (mm)				
	m³	KW	kg/cm²	OP..	CL.	kg	kg	A	B	C	D	E
M.E.-V. 2/ 1000 L	1	11	150	8	12	6000	1800	2300	1950	1900	1500	1350
M.E.-V. 2/ 1500 L	1,5	15	150	8	12	6000	2000	2500	2100	2000	1550	1450
M.E.-V. 2/ 2000 L	2	15	150	6	9	6000	2500	2500	2100	2000	1650	1600
M.E.-V. 2/ 2500 L	2,5	15	150	6	9	6000	2800	2600	2300	2100	1700	1900
M.E.-V. 2/ 3000 L	3	18,5	150	6	10	6500	3100	2900	2600	2300	1700	2000
M.E.-V. 2/ 3500 L	3,5	18,5	150	6	10	6500	3300	3000	2800	2300	1800	2000
M.E.-V. 2/ 4000 L	4	22	150	10	14	6500	3850	3300	2900	2500	1800	2000
M.E.-V. 2/ 5000 L	5	22	150	10	14	6500	4000	3400	2900	2500	1800	2300

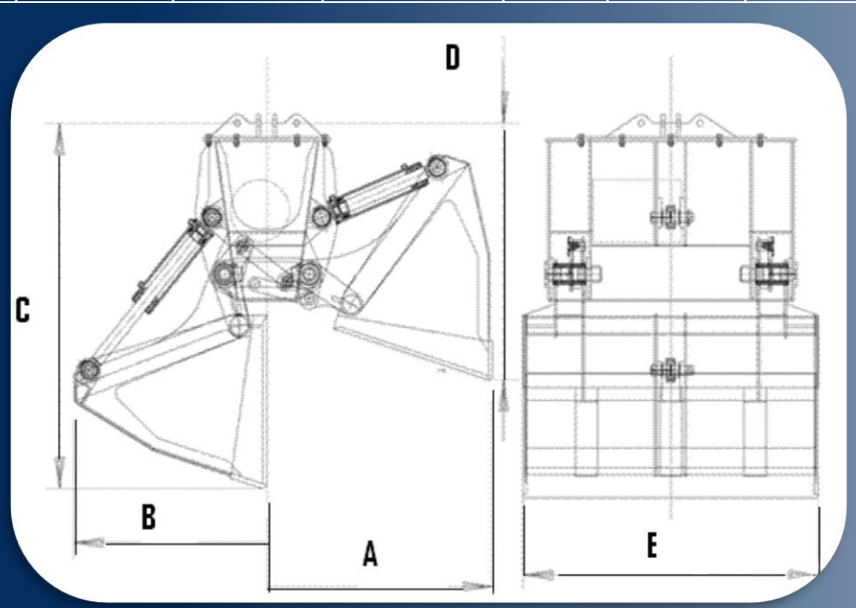

ELECTROHYDRAULIC CLAMSHELL 2 VERTICAL CYLINDERS (SPECIFIC WEIGHT UNTIL 2,4 T/M³)

MODEL	CAP.	ENGINE	PRESS.	TIME		CLAM POWER	WEIGHT	DIMENSIONS (mm)				
	m³	KW	kg/cm²	OP..	CL.	kg	kg	A	B	C	D	E
M.E.-V. 2/ 1000 P	1	15	180	4	7	6000	1950	2300	1950	1900	1500	1350
M.E.-V. 2/ 1250 P	1,3	15	180	4	7	6000	2100	2500	2100	2000	1550	1450
M.E.-V. 2/ 1500 P	1,5	15	180	4	7	6000	2200	2500	2100	2000	1650	1450
M.E.-V. 2/ 2000 P	2	15	180	4	7	6000	2500	2500	2100	2100	1650	1600
M.E.-V. 2/ 2500 P	2,5	15	180	6	9	6000	3200	2600	2300	2100	1700	1900
M.E.-V. 2/ 3000 P	3	18,5	180	6	9	6500	3800	2900	2600	2300	1800	2000
M.E.-V. 2/ 3500 P	3,5	18,5	180	6	9	6500	3850	3000	2800	2300	1800	2000
M.E.-V. 2/ 4000 P	4	22	180	7	10	6500	3900	3300	2900	2500	1800	2000
M.E.-V. 2/ 5000 P	5	22	180	7	10	6500	4200	3400	2900	2500	1900	2300

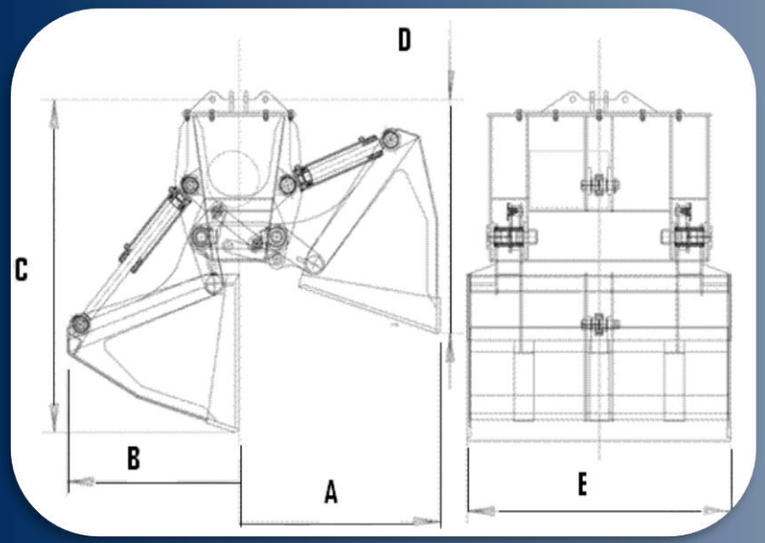

ELECTROHYDRAULIC CLAMSHELL 4 VERTICAL CYLINDERS (SPECIFIC WEIGHT UNTIL 1,4 T/M³)

MODEL	CAP.	ENGINE	PRESS.	TIME		CLAM POWER	WEIGHT	DIMENSIONS (mm)				
	m³	KW	kg/cm²	OP	CL	kg	kg	A	B	C	D	E
M.E.B.V. 4/ 1000 L	1	11	150			6000		2120	1950	1900	1400	1200
M.E.B.V. 4/ 1500 L	1,5	15	180			6000		2200	1950	1900	1450	1800
M.E.B.V. 4/ 1800 L	1,5	15	180			6000		2200	1950	1900	1450	1850
M.E.B.V. 4/ 2000 L	2	15	180			6000		2500	2000	2000	1500	1900
M.E.B.V. 4/ 2500 L	2,5	15	180	6	9	6000	2950	2700	2200	2050	1600	1900
M.E.B.V. 4/ 3000 L	3	18,5	180			6500		2900	2400	2300	1600	2200
M.E.B.V. 4/ 3500 L	3,5	18,5	180			6500		3000	2600	2300	1700	2500
M.E.B.V. 4/ 4000 L	4	22	180			6500		3300	2900	2500	1700	2500
M.E.B.V. 4/ 5000 L	5	22	180			6500		3400	2900	2500	1700	2800

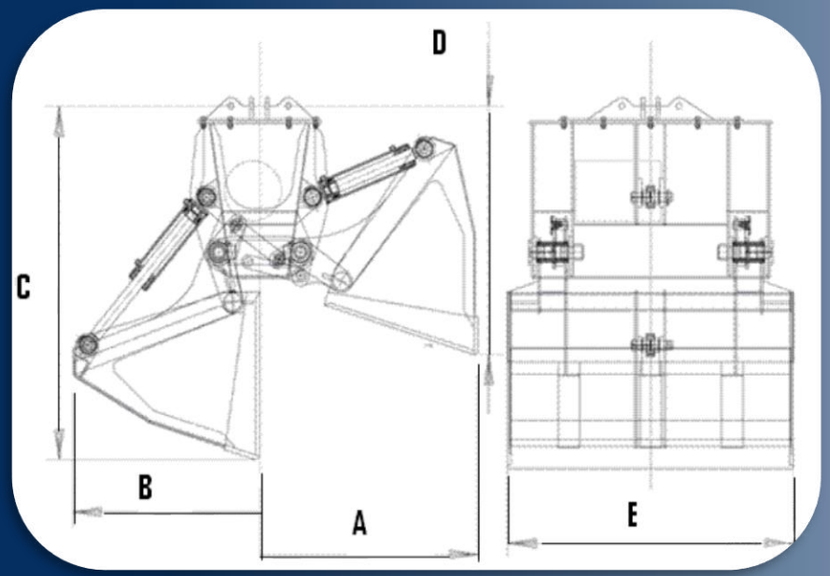

ELECTROHYDRAULIC CLAMSHELL 4 VERTICAL CYLINDERS (SPECIFIC WEIGHT UNTIL 2,2 T/M³)

MODEL	CAPAC.	ENGINE	PRESS.	TIME		CLAM POWER	WEIGHT	DIMENSIONS (mm)				
	m³	KW	kg/cm²	OP.	CL.	kg	kg	A	B	C	D	E
M.E.V. 4/ 500	0,5	7,5	130	7"	10"	9000	1300	1450	1760	1000	1800	1300
M.E.-V. 4/ 750	0,8	7,5	130	7"	10"	9000	1500	1600	1950	1000	1900	1350
M.E.-V. 4/1000	1	11	130	7"	10"	9000	1800	1850	2120	1000	1950	1300
M.E.-V. 4/1250	1,25	11	130	7"	10"	13250	1900	1900	2260	1250	2000	1420
M.E.-V. 4/1500	1,5	15	130	8"	12"	13250	2400	1950	2300	1300	2300	1600
M.E.-V. 4/2000	2	15	130	8"	12"	13250	3000	2000	2600	1400	2550	1750
M.E.-V. 4/2500	2,5	22	130	10"	14"	20000	3600	2270	2750	1700	2650	1800
M.E.-V. 4/3000	3	22	130	10"	14"	20000	4000	2400	2900	1750	2800	1850
M.E.-V. 4/3500	3,5	22	130	10"	14"	20000	4100	2500	2900	1750	2900	2000
M.E.-V. 4/4000	4	22	130	10"	17"	20000	4500	2600	3200	2000	3000	2000
M.E.-V. 4/4500	4,5	22	130	10"	17"	20000	4700	2600	3200	2100	3200	2100
M.E.-V. 4/5000	5	30	130	10"	17"	20000	5500	3000	3600	2300	3300	2100
M.E.-V. 4/6000	6	30	130	10"	17"	20000	6000	3000	3400	2400	3350	2300
M.E.-V. 4/7000	7	30	130	9"	16"	20000	6600	3000	3400	2500	3400	2300
M.E.-V. 4/10000	10	30	130	12"	19"	20000	9200	3600	4250	2800	3600	2600
M.E.-V. 4/12000	12	37	130	12"	119"	20000	9500	3700	4300	3000	3700	2700
SERIE AD INVERSIONE MOTORE - REVERSE SERIE												
M.E.-V. 4/ 500 I	0,5	7,5	130	7"	10"	9000	1300	1450	1760	1000	1800	1300
M.E.-V. 4/ 1000 I	1	11	130	8"	12"	9000	1800	1850	2120	1000	1950	1300
M.E.-V. 4/ 1500 I	1,5	22	130	8"	12"	13250	2400	1950	2120	1300	2050	1450
M.E.-V. 4/ 2500 I	2,5	22	130	10"	14"	20000	3600	2270	2750	1700	2650	1800

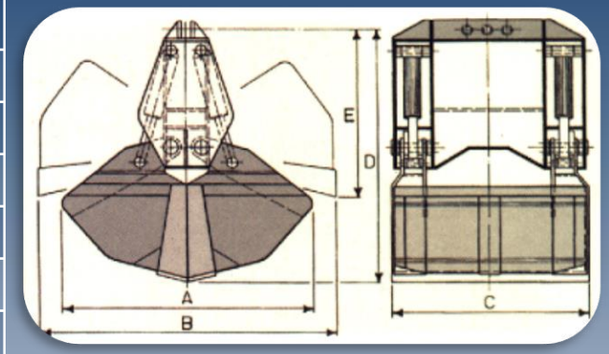

ELECTROHYDRAULIC CLAMSHELL 4 VERTICAL CYLINDERS (SPECIFIC WEIGHT UNTIL 4 T/M³)

MODEL	CAPAC.	ENGINE	TIME		CLAM POWER	WEIGHT	DIMENSIONS (mm)				
	m³	KW	OP.	CL.	kg	kg	A	B	C	D	E
M.E.-V. 4/ 1500 P	2	18,5	10	15	13250	3600	1950	2300	1300	2300	1600
M.E.-V. 4/ 2000 P	2	18,5	10	15	13250	3700	2000	2600	1400	2550	1750
M.E.-V. 4/ 2500 P	2,5	18,5	10	15	20000	4100	2270	2750	1700	2650	1800
M.E.-V. 4/ 3000 P	3	22	10	15	20000	4250	2400	2900	1750	2800	1850
M.E.-V. 4/ 3500 P	3,5	22	10	15	20000	4800	2500	2900	1750	2900	2000
M.E.-V. 4/ 4000 P	4	22	10	15	20000	5200	2600	3200	2000	3000	2000
M.E.-V. 4/ 4500 P	4,5	22	10	15	20000	5300	2600	3200	2100	3200	2100
M.E.-V. 4/ 5000 P	5	30	12	22	20000	7400	3000	3600	2300	3300	2100
M.E.-V. 4/ 6000 P	6	30	12	22	20000	8000	3000	3600	2400	3300	2100
M.E.-V. 4/10000 P	10	45	12	22	20000	10630	3500	4200	2850	3600	2700
SERIE AD INVERSIONE MOTORE - REVERSE SERIE											
M.E.-V. 4/ 1500 P	2	22	10	15	13250	3600	2000	2600	1400	2550	1850
M.E.-V. 4/ 2000 PI	2	22	10	15	13250	3700	2000	2600	1400	2550	1750
M.E.-V. 4/ 2500 PI	2,5	22	10	15	20000	4100	2270	2750	1700	2650	1800
M.E.-V. 4/ 3000 PI	3	22	10	15	20000	4250	2400	2900	1750	2800	1850
M.E.-V. 4/ 3500 PI	3,5	30	10	15	20000	4800	2500	2900	1750	2900	2000
M.E.-V. 4/ 4000 PI	4	30	12	16	20000	5200	2600	3200	2000	3000	2000
M.E.-V. 4/ 4500 PI	4,5	30	12	16	20000	5300	2600	3200	2100	3200	2100
M.E.-V. 4/ 5000 PI	5	37	14	18	20000	7400	3000	3600	2300	3300	2100
M.E.-V. 4/ 6000 PI	6	37	14	18	20000	8000	3000	3600	2400	3300	2100
M.E.-V. 4/10000 PI	10	45	22	28	20000	10630	3500	4200	2850	3600	2700

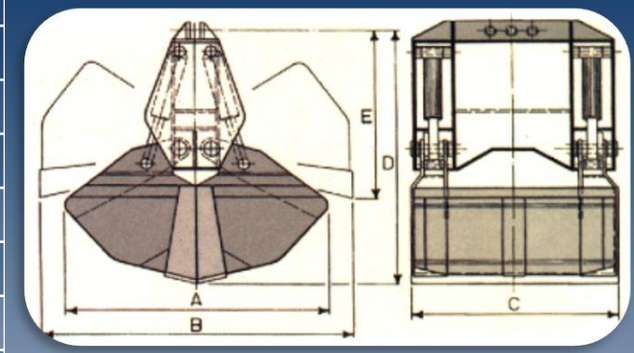

ELECTROHYDRAULIC CLAMSHELL 4 VERTICAL CYLINDERS (SPECIFIC WEIGHT UNTIL 5 T/M³)

MODEL	CAPAC.	ENGINE	TIME		CLAM POWER	WEIGHT	DIMENSIONS (mm)				
	m³	KW	OP.	CL.	kg	kg	A	B	C	D	E
M.E.-V. 4/ 2000 HD	2	22	10	15	13250	4300	2000	2600	1400	2550	1850
M.E.-V. 4/ 2500 HD	2,5	22	10	15	20000	4500	2270	2750	1700	2650	1850
M.E.-V. 4/ 3000 HD	3	22	10	15	20000	5200	2400	2900	1750	2800	1850
M.E.-V. 4/ 3500 HD	3,5	30	10	15	20000	6800	2500	2900	1750	2900	2000
M.E.-V. 4/ 4000 HD	4	30	10	15	20000	7100	2600	3200	2000	3000	2000
M.E.-V. 4/ 4500 HD	4,5	30	10	15	20000	7400	2600	3200	2100	3200	2100
M.E.-V. 4/ 5000 HD	5	37	12	22	20000	9500	3000	3600	2300	3300	2100
M.E.-V. 4/ 6000 HD	6	37	12	22	20000	9700	3000	3600	2400	3300	2100
M.E.-V. 4/10000 HD	10	45	12	22	20000	12850	3500	4200	2850	3600	2700
SERIE AD INVERSIONE MOTORE - REVERSE SERIE											
M.E.-V. 4/ 2000 HDI	2	22	10	15	13250	4300	2000	2600	1400	2550	1850
M.E.-V. 4/ 2500 HDI	2,5	22	10	15	20000	4500	2270	2750	1700	2650	1850
M.E.-V. 4/ 3000 HDI	3	22	10	15	20000	5200	2400	2900	1750	2800	1850
M.E.-V. 4/ 3500 HDI	3,5	30	10	15	20000	6800	2500	2900	1750	2900	2000
M.E.-V. 4/ 4000 HDI	4	30	12	16	20000	7100	2600	3200	2000	3000	2000
M.E.-V. 4/ 4500 HDI	4,5	30	12	16	20000	7400	2600	3200	2100	3200	2100
M.E.-V. 4/ 5000 HDI	5	37	14	18	20000	9500	3000	3600	2300	3300	2100
M.E.-V. 4/ 6000 HDI	6	37	14	18	20000	9700	3000	3600	2400	3300	2100
M.E.-V. 4/10000 HDI	10	45	22	28	20000	12850	3500	4200	2850	3600	2700

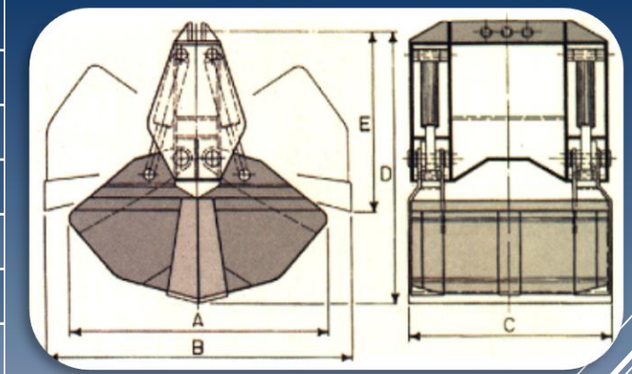

ELECTROHYDRAULIC TIMBER GRAB

MODEL	LOAD	ENGINE	PRESS.	POWER	TIME		WEIGHT	DIMENSIONS (mm)				
	m³	KW	kg/cm²		OP..	CL.	kg	A	B	C	D	E
F.E. / 5	5000	7,5	160	4000	6	9	1300	1400	2800	1400	1700	1700
F.E. /10	10000	11	160	7000	7	11	1500	1650	3400	1600	2000	2000
F.E. /15	15000	11	180	10000	7	11	1800	1900	3800	1800	2200	2200
F.E. /20	20000	11	180	12500	9	12	2000	2200	4300	2000	2400	2400
F.E.E. /15	15000	11	180	10000	8	14	1500	1000	1500	750	2300	1300
F.E.E. /20	20000	11	180	12500	8	14	1700	1100	1650	800	2400	1400
F.E.E. /25	25000	15	180	15000	9	15	1900	1200	1800	850	2500	1500
F.E.E. /30	30000	15	180	20000	9	15	2100	1300	2000	1000	2600	1600

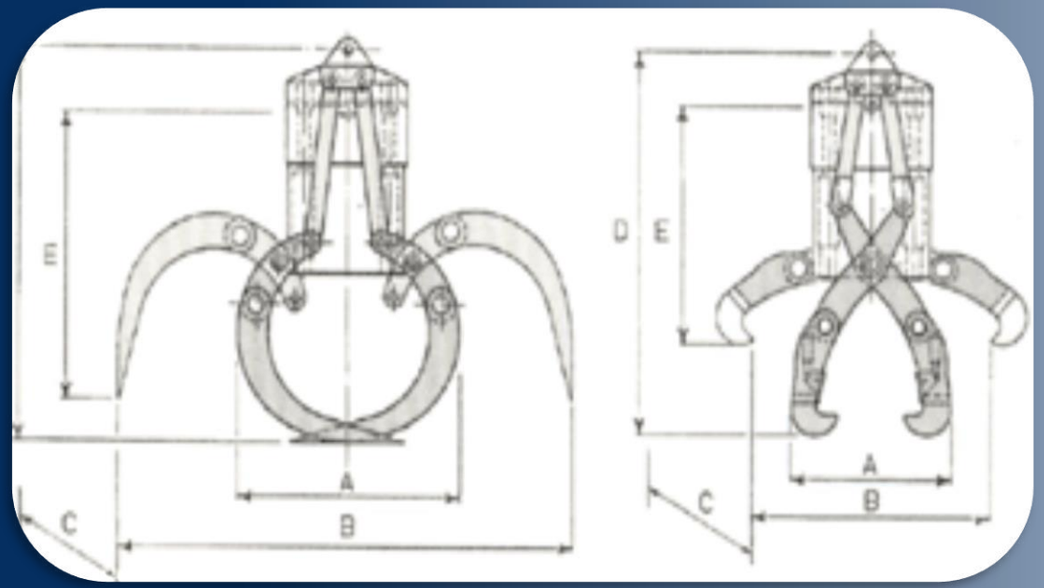

HYDRAULIC ORANGE PEEL GRAB – P.I.B. SERIE

MODEL	CAPAC.	PEEL	PRESS.	PEEL POWER	WEIGHT			DIMENSIONS (mm)			
	L	No.	kg/cm²	kg	kg			A	B	C	D
P.I.B. 300/5	300	5	200	1000	590	630	680	1100	1700	1200	1000
P.I.B. 400/5	400	5	200	1000	620	670	720	1160	1800	1380	1200
P.I.B. 500/5	500	5	200	1200	700	750	800	1200	2000	1400	1200
P.I.B. 600/5	600	5	200	1200	800	850	900	1300	2000	1450	1300
P.I.B. 300/6	300	6	200	1000	630	670	720	1100	1700	1200	1000
P.I.B. 400/6	400	6	200	1000	700	750	820	1160	2000	1380	1200
P.I.B. 500/6	500	6	200	1200	800	950	1100	1200	2000	1400	1200
P.I.B. 600/6	600	6	200	1200	900	1050	1200	1300	2000	1450	1300
P.I.B. 700/8	700	8	200	1200	1160	1230	1300	1450	2360	1550	1400
P.I.B. 800/8	800	8	200	1500	1250	1320	1390	1450	2400	1570	1450
P.I.B. 900/8	900	8	200	1500	1320	1410	1480	1500	2400	1600	1500
P.I.B. 1000/8	1000	8	200	1500	1400	1500	1600	1550	2600	1660	1530

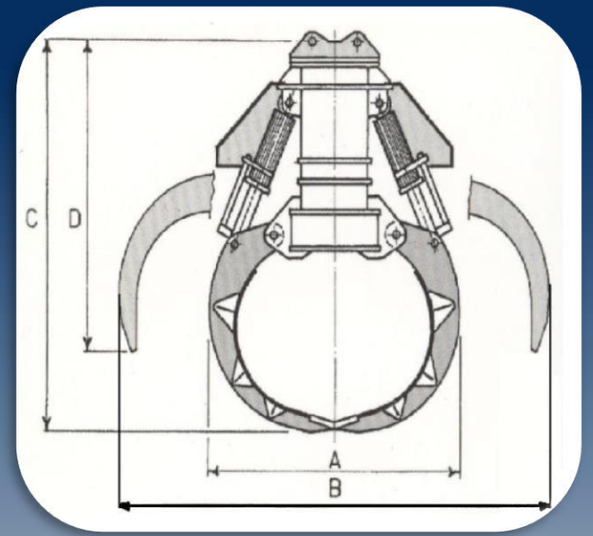

HYDRAULIC ORANGE PEEL GRAB – P.I. SERIE

MODEL	CAPAC.	PEEL	PRESS.	PEEL POWER	TIME		WEIGHT	DIMENSIONS (mm)			
	m³	No.	kg/cm²	kg	OP.	CL.	kg	A	B	C	D
P.I. 6/ 600 P	0,6	6	140	1400	5"	8"	1250	1500	2350	1800	1500
P.I. 6/ 750 P	0,75	6	140	1400	5"	8"	1500	1600	2300	1900	1600
P.I. 6/1000 P	1	6	140	1400	5"	8"	1600	1700	2700	2050	1750
P.I. 6/1200 P	1,2	6	160	1600	5"	8"	1700	1800	2700	2150	1800
P.I. 6/1500 P	1,5	6	160	2000	8"	12"	2500	1950	3150	2300	1850
P.I. 8/1000 P	1	8	150	1500	6"	9"	2000	1700	2700	2050	1750
P.I. 8/1200 P	1,2	8	160	1600	5"	8"	2150	1800	2700	2150	1800
P.I. 8/1500 P	1,5	8	160	2000	8"	12"	3000	1950	3150	2300	1850
P.I. 8/2000 P	2	8	160	2000	8"	12"	4000	2200	3500	2450	2050
P.I. 8/2500 P	2,5	8	160	3000	9"	15"	4800	2500	3700	2800	2400
P.I. 8/3000 P	3	8	160	3000	9"	15"	5400	2700	3900	2900	2600
P.I. 8/3500 P	3,5	8	160	3300	12"	18"	6000	2750	4050	2900	2600
P.I. 8/4000 P	4	8	160	3300	12"	18"	6500	2850	4300	3000	2600
P.I. 8/4500 P	4,5	8	160	3300	12"	18"	7000	2850	4350	3000	2700
P.I. 8/5000 P	5	8	160	3300	12"	18"	7500	2900	4500	3000	2700

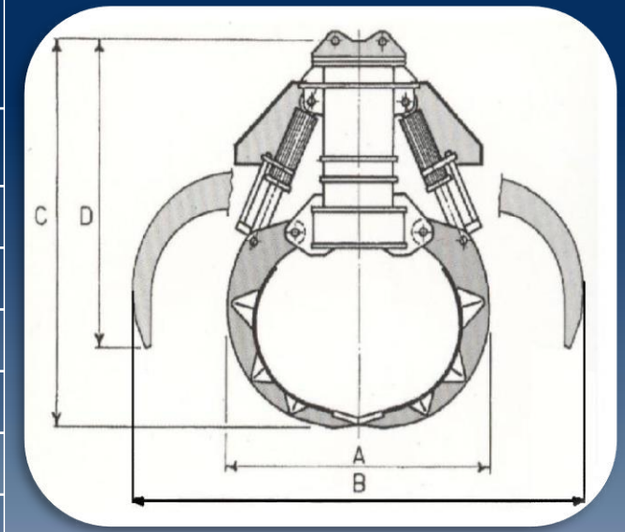

HYDRAULIC ORANGE PEEL GRAB - HD SERIE

MODEL	CAPAC.	PEEL	PRESS.	PEEL POWER	TIME		WEIGHT	DIMENSIONS (mm)			
	m³	No.	kg/cm²	kg	OP.	CL.	kg	A	B	C	D
P.I. 6/ 500 HD	0,5	6	140	1400	5"	8"	1300	1500	2350	1700	1400
P.I. 6/ 600 HD	0,6	6	140	1400	5"	8"	1500	1500	2350	1800	1500
P.I. 6/ 750 HD	0,75	6	140	1400	5"	8"	1800	1600	2300	1900	1600
P.I. 6/1000 HD	1	6	140	1400	5"	8"	2100	1700	2700	2050	1750
P.I. 6/1200 HD	1,2	6	160	1600	5"	8"	2600	1800	2700	2150	1800
P.I. 6/1500 HD	1,5	6	160	2000	8"	12"	3200	1950	3150	2300	1850
P.I. 8/1000 HD	1	8	150	1500	6"	9"	3000	1700	2700	2050	1750
P.I. 8/1200 HD	1,2	8	160	1600	5"	8"	3200	1800	2700	2150	1800
P.I. 8/1500 HD	1,5	8	160	2000	8"	12"	3400	1950	3150	2300	1850
P.I. 8/2000 HD	2	8	160	2000	8"	12"	4500	2200	3500	2450	2050
P.I. 8/2500 HD	2,5	8	160	3000	9"	15"	7000	2500	3700	2800	2400
P.I. 8/3000 HD	3	8	160	3000	9"	15"	8000	2700	3900	2900	2600
P.I. 8/3500 HD	3,5	8	160	3300	12"	18"	9000	2750	4050	2900	2600
P.I. 8/4000 HD	4	8	160	3300	12"	18"	9500	2850	4300	3000	2600
P.I. 8/4500 HD	4,5	8	160	3300	12"	18"	10000	2850	4350	3000	2700
P.I. 8/5000 HD	5	8	160	3300	12"	18"	10200	2900	4500	3000	2700
P.I. 8/8000 HD	8	8	220	3300	12"	18"	11300	3400	5300	4500	3900

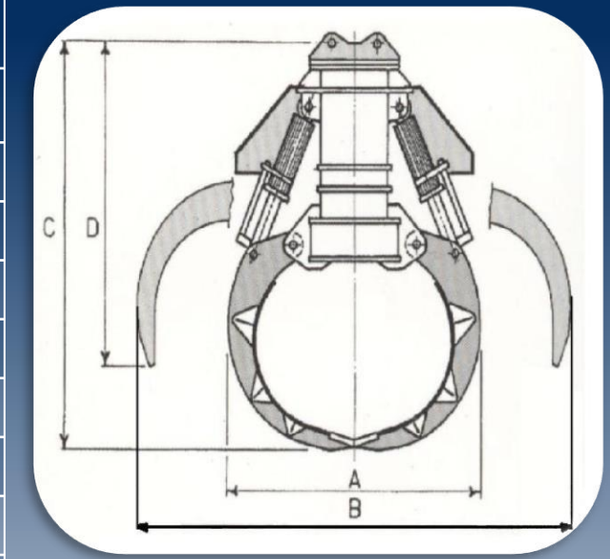

HYDRAULIC CLAMSHELL 1 VERTICAL CYLINDER

MODEL	CAPAC.	PRESS.	TEETH	CLAM POWER	WEIGHT	DIMENSIONS (mm)				
	L	kg/cm²	No.	kg	kg	A	B	C	D	E
M.I.V. / 300	300	300	4	10000	700	1400	1480	1500	1250	600
M.I.V. / 400	400	300	4	10000	800	1450	1600	1600	1300	700
M.I.V. / 500	500	300	6	13000	900	1500	1600	1800	1330	800
M.I.V. / 600	600	300	6	13000	1000	1550	1680	1880	1380	850
M.I.V. / 700	700	300	6	18000	1100	1600	1740	1950	1450	900
M.I.V. / 800	800	300	6	18000	1200	1650	1790	2050	1550	950
M.I.V. / 900	900	300	6	20000	1350	1700	1840	2150	1650	1000
M.I.V. /1000	1000	300	6	20000	1500	1750	1900	2250	1700	1050
M.I.V. /1200	1200	300	8	25000	1700	1800	2000	2300	1750	1150
M.I.V. /1500	1500	300	8	25000	1900	1900	2100	2350	1800	1250
M.I.V. /2000	2000	300	8	25000	2500	2300	2500	2500	1900	1400

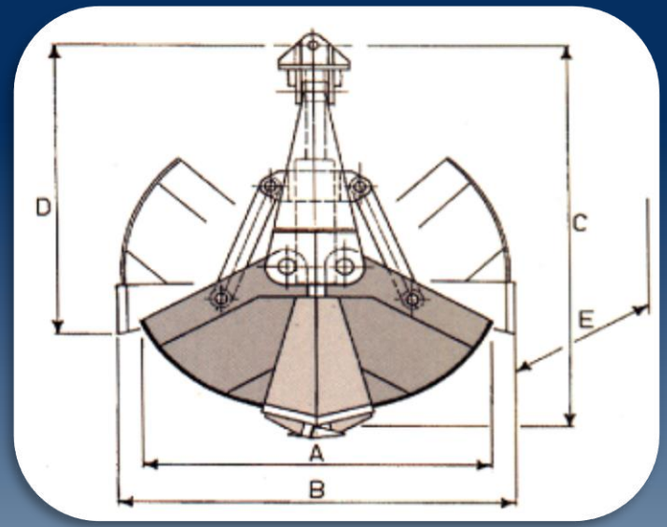

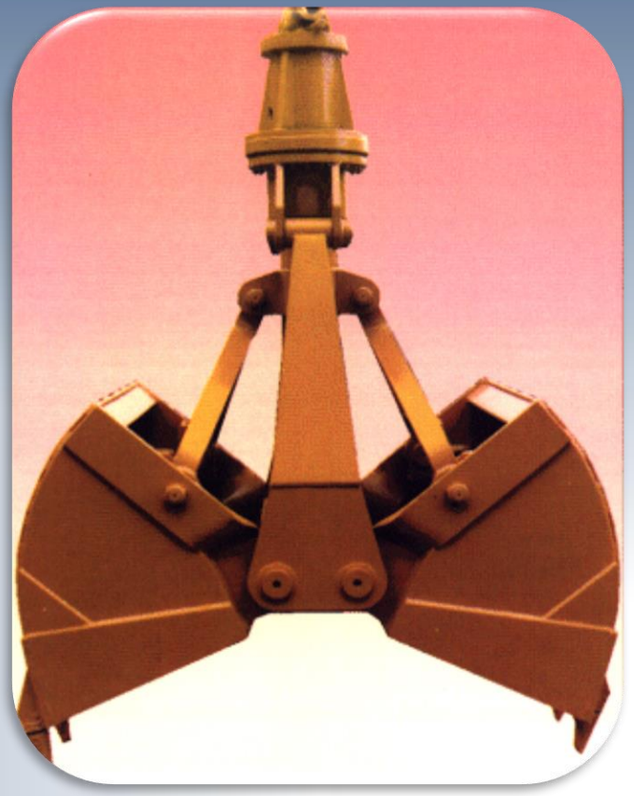

HYDRAULIC CLAMSHELL 2 ORIZONTAL CYLINDERS

MODEL	CAPAC.	PRESS.	TIME		CLAM POWER	WEIGHT	DIMENSIONS (mm)				
	L	kg/cm²	OP.	CL.	kg	kg	A	B	C	D	E
M.I.-O. 2/1500	1,5	160	7"	10"	7700	1700	1890	2800	1400	1700	1500
M.I.-O. 2/2000	2	160	7"	10"	7700	1900	1950	3200	1470	1800	1600
M.I.-O. 2/2500	2,5	160	8"	12"	9500	2400	2350	3300	1600	1900	1700
M.I.-O. 2/3000	3	160	8"	12"	9500	2800	2400	3400	1600	2000	1800
M.I.-O. 2/3500	3,5	160	8"	12"	9500	3200	2400	3500	1700	2100	1900
M.I.-O. 2/4000	4	140	10"	14"	13000	3600	2400	3700	1800	2250	1950
M.I.-O. 2/4500	4,5	140	10"	14"	13000	4000	2730	3800	1900	2400	2100
M.I.-O. 2/5000	5	140	10"	14"	13000	4500	2820	4000	2000	2550	2250
M.I.-O. 2/6000	6	140	10"	14"	16500	5000	2900	4200	2100	2650	2350
M.I.-O. 2/7000	7	140	10"	14"	16500	5500	3000	4400	2200	2800	2450
M.I.-O. 2/8000	8	140	10"	14"	16500	6000	3200	4600	2400	3000	2600

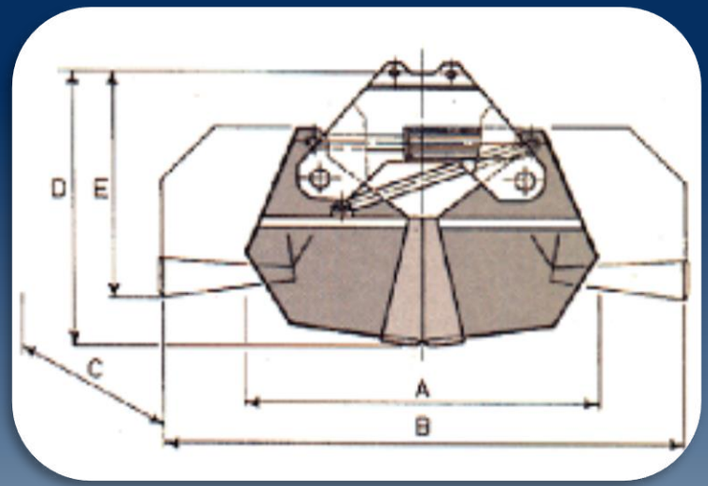

HYDRAULIC CLAMSHELL 4 ORIZONTAL CYLINDERS

MODEL	CAPAC.	PRESS.	TIME		CLAM POWER	WEIGHT	DIMENSIONS (mm)				
	L	kg/cm²	OP.	CL.	kg	kg	A	B	C	D	E
M.I.-V. 4/500	0,5	160	5"	8"	3500	1000	1450	1750	800	1800	1300
M.I.-V. 4/750	0,75	160	5"	8"	9000	1250	1600	1950	900	1900	1350
M.I.-V.4/1000	1	160	5"	8"	9000	1500	1850	2050	1000	1950	1400
M.I.-V.4/1250	1,25	160	5"	8"	13250	1750	1900	2100	1250	2000	1420
M.I.-V.4/1500	1,5	160	8"	12"	13250	2000	1950	2250	1300	2200	1500
M.I.-V.4/1800	1,8	160	8"	12"	13250	2200	1900	2400	1300	2200	1550
M.I.-V.4/2000	2	160	8"	12"	20000	2500	2000	2600	1400	2550	1750
M.I.-V. 4/2500	2,5	140	8"	12"	20000	3000	2000	2600	1700	2550	1750
M.I.-V. 4/3000	3	140	10"	14"	24000	4000	2300	2900	1800	2800	1850
M.I.-V. 4/3500	3,5	140	10"	14"	24000	4200	2500	3050	1800	2900	1900
M.I.-V. 4/4000	4	140	10"	14"	24000	4500	2600	3200	2000	3000	1920
M.I.-V. 4/9000	9	150				9000	3200	3800	2800	3600	2600

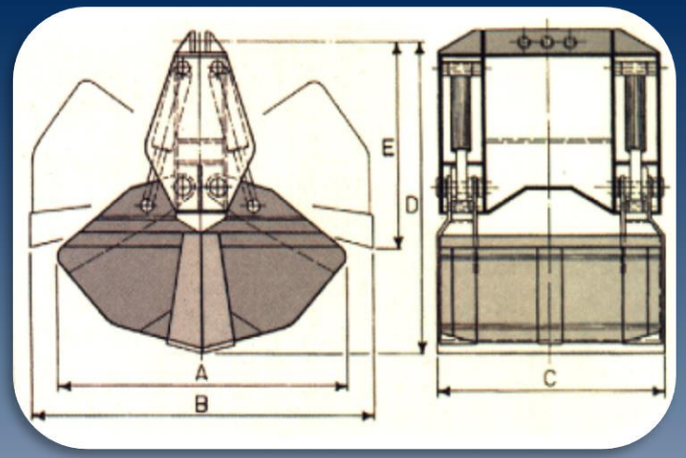

HYDRAULIC STONE GRAB

MODEL	CAPAC.	TEETH	TEETH POWER	PRESS.	WEIGHT	DIMENSIONS (mm)			
	kg	No.	kg	kg/cm²	kg	A	B	C	D
T.I. 3/ 5	5000	3	2000	160	1000	1500	1900	1950	1650
T.I. 4/ 5	5000	4	2000	160	1300	1500	1900	1950	1650
T.I. 5/ 5	5000	5	1800	150	1600	1500	1900	1950	1650
T.I. 6/ 5	5000	6	1800	150	1900	1500	1900	1950	1650
T.I. 3/10	10000	3	3500	170	1600	1900	2600	2550	2200
T.I. 4/10	10000	4	3500	170	2000	1900	2600	2550	2200
T.I. 5/10	10000	5	3000	150	2400	1900	2600	2550	2200
T.I. 6/10	10000	6	3000	150	2800	1900	2600	2550	2200
T.I. 3/15	15000	3	5000	180	2500	2200	3000	2900	2500
T.I. 4/15	15000	4	4200	160	3200	2200	3000	2900	2500
T.I. 5/15	15000	5	4000	150	3900	2200	3000	2900	2500
T.I. 6/15	15000	6	4000	150	4600	2200	3000	2900	2500
T.I. 3/20	20000	3	6000	200	4400	2500	3500	3100	3000
T.I. 4/20	20000	4	5000	180	5600	2500	3500	3100	3000
T.I. 5/20	20000	5	4500	160	6800	2500	3500	3100	3000
T.I. 6/20	20000	6	4200	150	8000	2500	3500	3100	3000
T.I. 3/30	30000	3	6500	200	6300	2800	4000	3400	3000
T.I. 4/30	30000	4	5500	180	7500	2800	4000	3400	3000
T.I. 5/30	30000	5	5000	160	8700	2800	4000	3400	3000
T.I. 6/30	30000	6	4500	150	10000	2800	4000	3400	3000

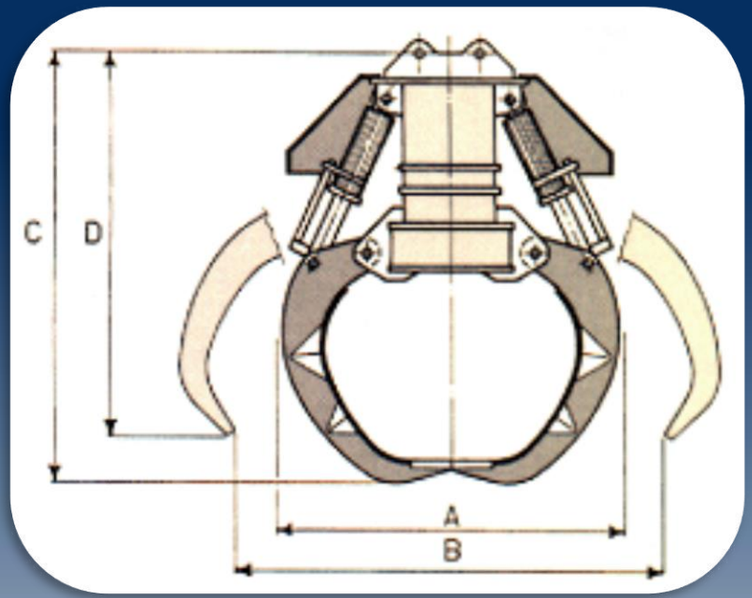

HYDRAULIC TIMBER GRAB

MODEL	CAPAC.	LOAD POWER	PRESS.	WEIGHT	DIMENSIONS (mm)				
	L	kg	BAR	kg	A	B	C	D	E
F.I. / 5	0,8	4000	200	1400	1650	2300	2000	1650	600
F.I. / 8	1	6000	200	1700	1800	2500	2100	1750	600
F.I. /10	1,25	8000	200	2000	1950	2600	2200	1850	600

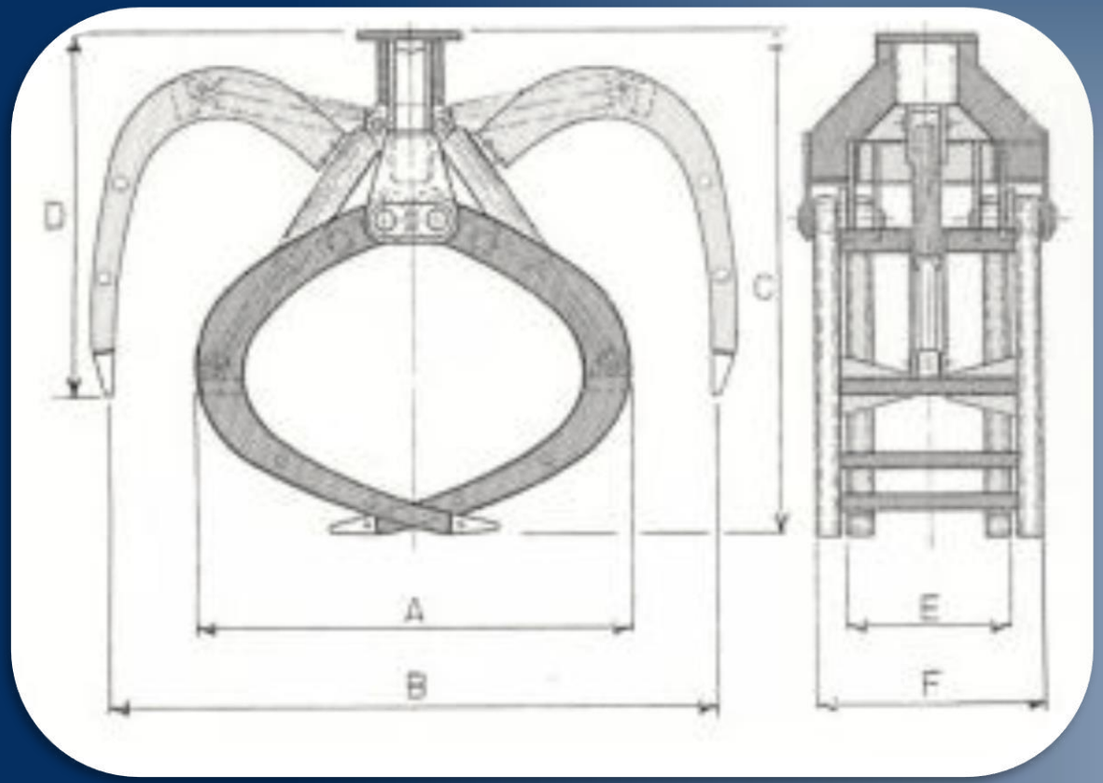

MECHANICAL ORANGE PEEL GRAB SERIE PM2 S
(SPECIFIC WEIGHT UNTIL 2T/M³)

MODEL	CAPAC.	PEEL	ROPE	PULLEYS	PULLEYS	WEIGHT	DIMENSIONS (mm)			
	m³	No.	Ø	Ø	No.	kg	A	B	C	D
P.M.2- 6/ 500 S	0.5	6	16	320	4	1500	1700	2500	1980	2090
P.M.2- 6/ 750 S	0.75	6	16	320	4	2200	1870	2860	2200	2420
P.M.2- 6/ 1000 S	1	6	18	360	4	2800	1900	3025	2365	2530
P.M.2- 6/ 1250 S	1.25	6	18	360	4	3000	1980	3300	2475	2695
P.M.2- 6/ 1500 S	1.5	6	20	400	4	3200	2200	3355	2800	3520
P.M.2- 6/ 1800 S	1.8	6	20	400	4	3500	2255	3465	2970	3850
P.M.2- 8/ 2000 S	2	8	22	440	5	3800	2420	3960	3000	4200
P.M.2- 8/ 2500 S	2.5	8	22	440	5	4000	2750	4620	3150	4350
P.M.2- 8/ 3000 S	3	8	27	540	5	4200	3410	4650	3300	4620

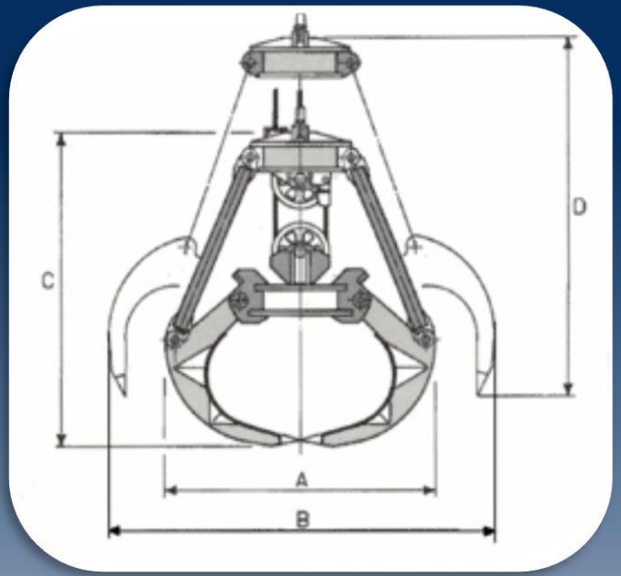

MECHANICAL ORANGE PEEL GRAB SERIE PM2 P (SPECIFIC WEIGHT UNTIL 2T/M³)

MODEL	CAPAC.	PEEL	ROPE	PULLEYS	PULLEYS	WEIGHT	DIMENSIONS (mm)			
	m³	No.	Ø	Ø	No.	kg	A	B	C	D
P.M. 2- 6/ 500 P	0,5	6	16	320	4	1700	1700	2500	1980	2090
P.M. 2- 6/ 750 P	0,75	6	16	320	4	2500	1870	2860	2200	2420
P.M. 2- 6/1000 P	1	6	18	340	4	3000	1900	3025	2365	2530
P.M. 2- 6/1250 P	1,25	6	18	340	4	3100	1980	3300	2475	2695
P.M. 2- 6/1500 P	1,5	6	20	400	4	3100	2200	3355	2800	3740
P.M. 2- 6/1800 P	1,8	6	20	400	4	3800	2255	3465	2970	4180
P.M. 2- 8/2000 P	2	8	22	440	5	4100	2420	3960	3000	4200
P.M. 2- 8/2500 P	2,5	8	22	440	5	4500	2750	4620	3150	4350
P.M. 2- 8/3000 P	3	8	27	540	5	6500	3410	4650	3300	4620
P.M. 2- 8/4000 P	4	8	27	540	6	9000	3500	4700	3900	4650
P.M. 2- 8/5000 P	5	8	27	540	6	10500	3500	4900	3950	4720

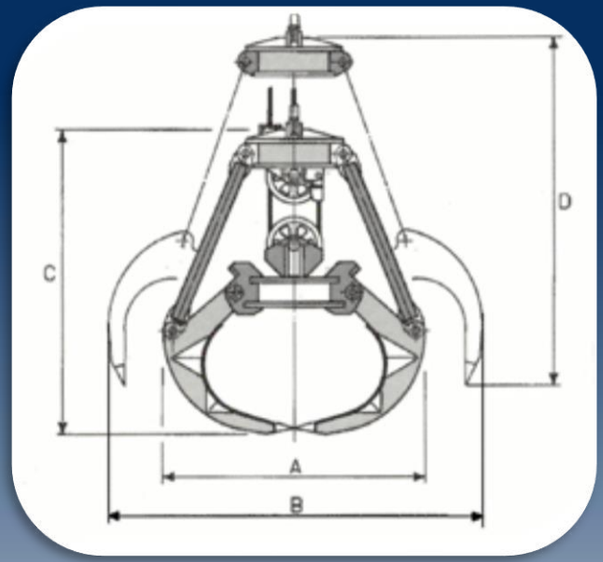

TIMBER MECHANICAL GRAB 2 ROPES SERIE FM2

MODEL	CAPAC.	ROPE	PULLEYS	WEIGHT	DIMENSIONS (mm)				
	kg	Ø	Ø	kg	A	B	C	D	E
F.M. 1000	1000	24	400	2300	2100	2600	4000	3100	1500
F.M. 1600	1600	24	440	3600	3400	4600	5400	4365	2000

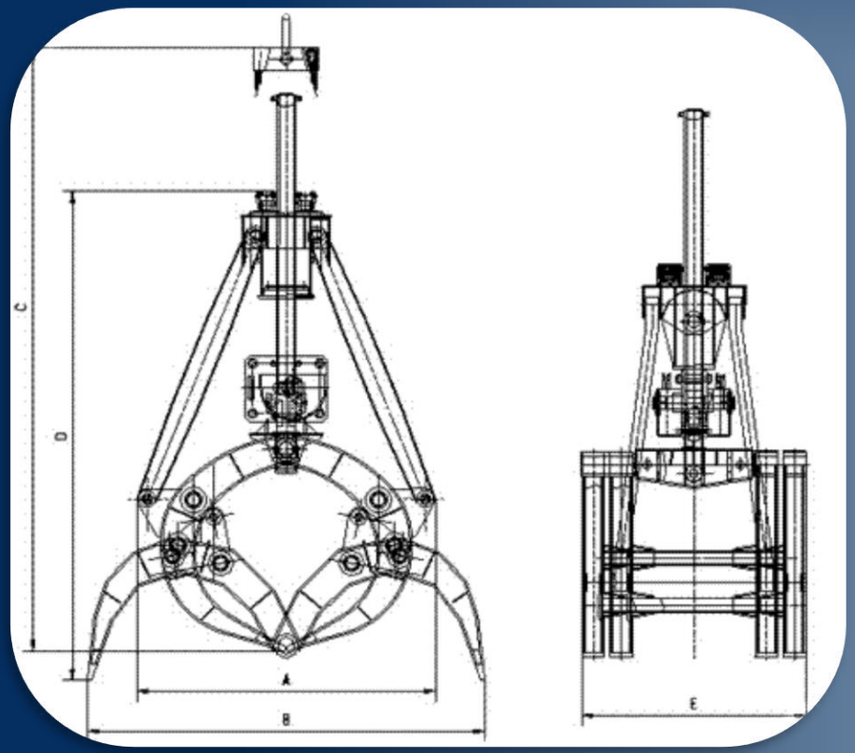

MECHANICAL STONE GRAB

MODEL	CAPAC.	TEETH	ROPE	PULLEYS	PULLEYS	WEIGHT	DIMENSIONS (mm)			
	kg	No.	Ø	No.	Ø	kg	A	B	C	D
T.M. 3/ 5	5000	3	18	4	360	1400	1700	2500	2200	2600
T.M. 4/ 5	5000	4	18	4	360	1700	1700	2500	2200	2600
T.M. 5/ 5	5000	5	18	4	360	2000	1700	2500	2200	2600
T.M. 6/ 5	5000	6	18	4	360	2300	1700	2500	2200	2600
T.M. 3/10	10000	3	22	4	440	2000	2000	2800	2450	2800
T.M. 4/ 10	10000	4	22	4	440	2400	2000	2800	2450	2800
T.M. 5/ 10	10000	5	22	4	440	2800	2000	2800	2450	2800
T.M. 6/ 10	10000	6	22	4	440	3200	2000	2800	2450	2800
T.M. 3/ 15	15000	3	27	5	540	2800	2400	3200	2600	3000
T.M. 4/ 15	15000	4	27	5	540	3400	2400	3200	2600	3000
T.M. 5/ 15	15000	5	27	5	540	4000	2400	3200	2600	3000
T.M. 6/ 15	15000	6	27	5	540	4600	2400	3200	2600	3000
T.M. 3/ 20	20000	3	30	5	600	4400	2700	3500	2800	3200
T.M. 4/ 20	20000	4	30	5	600	5600	2700	3500	2800	3200
T.M. 5/ 20	20000	5	30	5	600	6800	2700	3500	2800	3200
T.M. 6/ 20	20000	6	30	5	600	8000	2700	3500	2800	3200

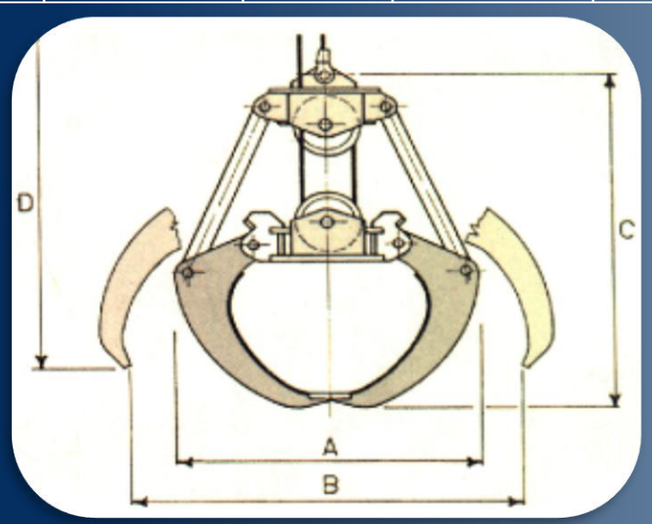

THE VERDELLI'S TEAM IS ALWAYS WORKING TO MEET YOUR NEEDS!

Verdelli International Srl

EQUIPMENT AND SPARE PARTS
LIFTING, PILING, EARTHMOVING MACHINERY
DEMOLITION TOOLS

VERDELLI INTERNATIONAL SRL

Via Settecani Cavidole, 45/A

41051 – Castelnuovo Rangone (MO) – ITALY

VAT IT03670840366

www.verdelli.eu

Tel. +39 059 535707

international@verdelli.it – silvio@verdelli.it